

---

**AMIETE – ET/CS/IT (OLD SCHEME)**


---

Time: 3 Hours

**DECEMBER 2011**

Max. Marks: 100


**NOTE:** There are 9 Questions in all.

- Please write your Roll No. at the space provided on each page immediately after receiving the Question Paper.
- Question 1 is compulsory and carries 20 marks. Answer to Q.1 must be written in the space provided for it in the answer book supplied and nowhere else.
- The answer sheet for the Q.1 will be collected by the invigilator after 45 Minutes of the commencement of the examination.
- Out of the remaining EIGHT Questions answer any FIVE Questions. Each question carries 16 marks.
- Any required data not explicitly given, may be suitably assumed and stated.

**Q.1 Choose the correct or the best alternative in the following: (2×10)**

- a. Signal  $x(t) = e^{-at} u(t)$ ,  $a > 0$  is a
- (A) Power signal (B) Energy signal  
(C) neither (A) and (B) (D) can't decide
- b. The Fourier transform of an impulse function is
- (A)  $\delta(\omega)$  (B)  $2\pi\omega$   
(C) 1 (D)  $\text{sinc}(\omega)$
- c.  $\delta(n - N) * \delta(n + N)$  will result in
- (A) Zero (B) Always 1  
(C) N (D) can't decide from given data
- d. Convolution is used to find \_\_\_\_\_ of an LTI System. (Fill the blank)
- (A) Impulse response (B) Frequency response  
(C) time response (D) phase response
- e. Z-transform of  $x(-n)$  will be
- (A)  $X(Z^{-1})$  (B)  $X(-1/Z)$   
(C)  $X(1/Z^{-1})$  (D) Z
- f. Laplace Transforms of the functions  $x(t) = 4 \sin(100t)u(t)$  is
- (A)  $100 / (s^2 + 400^2)$  (B)  $400 / (s^2 + 100^2)$   
(C)  $100 / (s + 400)^2$  (D)  $400 / (s + 100)^2$
- g. The signal  $y(t) = \sin(x(t))$  is
- (A) linear, causal (B) linear, non-causal  
(C) non-linear, causal (D) non-linear, non-causal
- h. The ideal band-limited interpolation uses
- (A) sine function (B) sine wave

i.

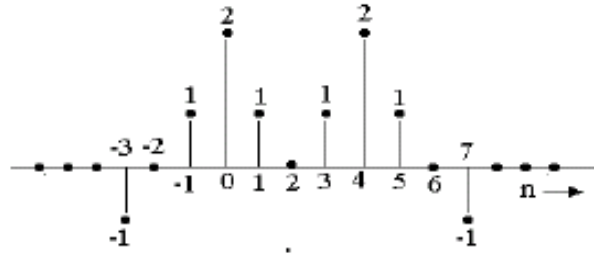

For the signal shown in the above fig. The integral  $\int_{-\pi}^{\pi} |X(e^{j\omega})|^2 d\omega$  will give

- (A)  $2\pi$
- (B)  $4\pi$
- (C)  $16\pi$
- (D)  $28\pi$

j. For a random variable  $f(x)$  the integral  $\int x f(x) dx$ , defines

- (A) variance
- (B) mean
- (C) pdf
- (D) co-variance

**Answer any FIVE Questions out of EIGHT Questions.  
Each question carries 16 marks.**


**Q.2** a. Define Signal. Give detailed classification of various signals with example. (6)

b. 
$$x[n] = \begin{cases} 0 & \text{if } n < 2 \\ 2n - 4 & \text{if } 2 \leq n < 4 \\ 4 - n & \text{if } 4 \leq n \end{cases}$$

- (i) Sketch  $x(n)$ . (ii) Sketch  $y(n) = x(n-1)$ . (4)

c. The response of an LTI system to a step input,  $x(t) = u(t)$  is  $y(t) = (1 - e^{-2t})u(t)$ . What is the response to an input of  $x(t) = 2u(t) - 4u(t-1)$ ? (6)

**Q.3** a.

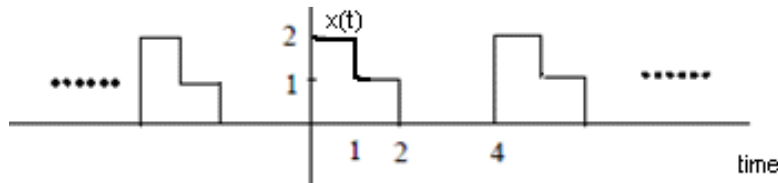

Determine the Fourier series representation for the above signal. (10)

b. Consider an LTI system with impulse response  $h(n) = a^n u(n)$ ,  $-1 < a < 1$ , with the input signal  $x(n) = \cos(2\pi n / N)$ . Determine  $y(n)$ . (6)

**Q.4** a. State and explain convergence conditions for continuous-time Fourier transform. (3)

- b. Consider a stable LTI system characterized by the differential equation

$$\frac{dy(t)}{dt} + 5y(t) = x(t)$$

Determine (i) frequency response and (ii) impulse response. (5)

- c. State and prove Parseval's theorem for continuous time periodic signal. (8)

- Q.5** a. Determine the discrete -time Fourier transform of unit-step sequence  $x(n) = u(n)$ . Comments on the result obtained. (8)

- b. For the signal  $x(n) = \cos \omega_0 n$  with  $\omega_0 = 2\pi/5$ , obtain and plot  $X(e^{j\omega})$  (4)

- c. Draw low-pass filter magnitude characteristics with all necessary tolerance limits. (4)

- Q.6** a. Describe discrete - time processing of continuous- time signals in detail, with necessary block diagrams. (8)


- b. For the first-order LTI system described by  $y(n) - ay(n-1) = x(n)$  with  $|a| < 0$ , obtain magnitude and phase of the frequency response. (8)

- Q.7** a. Obtain z- transform for  
(i)  $x_1(n) = (1/3)^n [\sin(\pi n / 4)] u(n)$   
(ii)  $x_2(n) = -a^n u(-n-1)$   
Plot pole -zero diagram and state ROC for both. (8)

- b. State initial value theorem for Z-transform. List its utility. For the sequence  $x(n) = 7 (1/3)^n u(n) - 6 (1/2)^n u(n)$ , find  $x(0)$  using initial value theorem. (8)

- Q.8** a. For signal  $x(t) = e^{-at} u(t)$ , determine (i) Fourier transform (ii) Laplace transform. If  $a = 0$ , whether both transforms exist? If, yes determine the same. (8)

- b.

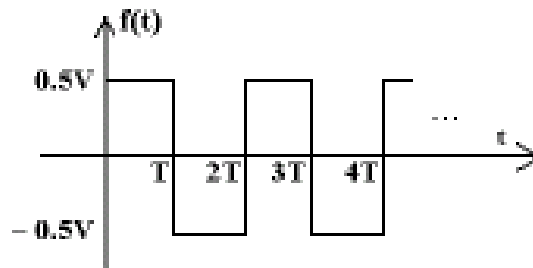

Obtain the Laplace transform of the square wave given in above figure. (8)

- Q.9** a. Write short note on:-  
(i) Gaussian random variable. (ii) Joint probability. (8)

- b. The pdf of random variable  $x$  is given by  $f_x(x) = k$ ,  $a \leq x \leq b$  and  $f_x(x) = 0$ , otherwise.  
Determine (i) the value of constant  $k$ .