

## AMIETE – ET (NEW SCHEME)

**JUNE 2012**

Time: 3 Hours

Max. Marks: 100

**PLEASE WRITE YOUR ROLL NO. AT THE SPACE PROVIDED ON EACH PAGE IMMEDIATELY AFTER RECEIVING THE QUESTION PAPER.**

**NOTE:** There are 9 Questions in all.

- Question 1 is compulsory and carries 20 marks. Answer to Q.1 must be written in the space provided for it in the answer book supplied and nowhere else.
- The answer sheet for the Q.1 will be collected by the invigilator after 45 minutes of the commencement of the examination.
- Out of the remaining EIGHT Questions answer any FIVE Questions. Each question carries 16 marks.
- Any required data not explicitly given, may be suitably assumed and stated.

**Q.1** Choose the correct or the best alternative in the following: (2×10)

- a. For an ideal lever shown in Fig.1, the displacement ratio  $\left(\frac{x}{y}\right)$  and the force


advantage  $\left(\frac{F_1}{F_2}\right)$  are given by:

(A)  $\frac{a}{b}; \frac{b}{a}$

(B)  $\frac{b}{a}; \frac{a}{b}$

(C)  $ab, \frac{a}{b}$

(D)  $\frac{a}{b}, ab$

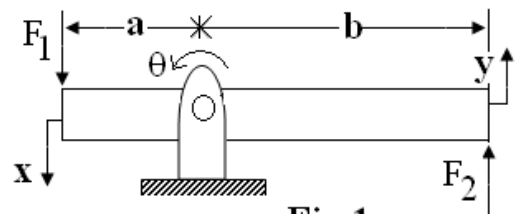

**Fig.1**

- b. For repetitive and/or hazardous tasks to be carried out at great speed and high precision, we use:
- (A) control systems (B) servomechanisms  
(C) robotics (D) mechanical system
- c. If change in electrical system is analogous to heat flow in thermal system, then current and voltage represent respectively:
- (A) temperature and heat flow rate  
(B) heat flow rate and temperature  
(C) thermal resistance and thermal capacitance  
(D) thermal capacitance and thermal resistance

- d. The system sensitivity  $S_K^T$  to feedback gain K in  $T = \frac{A}{1 + KA}$ ,  $A = 10^4$ ,  $K = 0.1$ ,

is given by:

(A) -0.01

(B) -0.1

(C) 1

(D) -1

- e. In the signal-flow graph shown in Fig.2 with an input disturbance torque  $T_D(s)$


and  $|G_1(s)G_2(s)H(s)| \gg 1$ , the ratio  $\left(\frac{C_D(s)}{T_D(s)}\right)$  is given by:

(A)  $\frac{-G_2(s)}{G_1(s)H(s)}$

(B)  $\frac{-1}{G_1(s)H(s)}$

(C)  $\frac{G_1(s)+G_2(s)}{G_1(s)G_2(s)H(s)}$

(D)  $\frac{-G_1(s)+G_2(s)}{G_1(s)G_2(s)H(s)}$

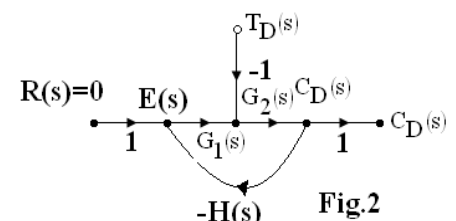


**Fig.2**

- f. With reference to Fig.3, where  $\zeta = \cos \phi$  is the damping factor

$$0 < \tan^{-1} \left( \frac{\sqrt{1-\zeta^2}}{\zeta} \right) < \frac{\pi}{2} \text{ is applicable for:}$$

- (A)  $\zeta < 0$   
 (B)  $\zeta \leq 1$   
 (C)  $0 < \zeta \leq 1$   
 (D)  $0 < \zeta < 1$

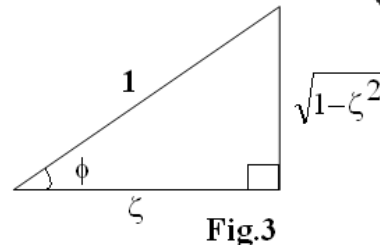

- g. An incremental optical encoder used as a controller component having two channels and 30 sectors of disc (each sector being half transparent and half opaque) has improved basic resolution of:

- (A)  $3^\circ$  (B)  $30^\circ$   
 (C)  $300^\circ$  (D)  $360^\circ$

- h. If all the roots of the system  $s^3 + 7s^2 + 25s + 39 = 0$  are to have real parts more negative than  $-1$ , then to check the relative stability, we should consider modified characteristic equation:

- (A)  $z^3 - 3z^2 - 14z + 39 = 0$  (B)  $z^3 + 4z^2 + 14z + 20 = 0$   
 (C)  $z^3 + 7z^2 + 28z + 14 = 0$  (D)  $z^3 + 4z^2 + 11z + 13 = 0$

- i. For the system  $G(s) = \frac{9.7}{s(0.046s + 1)}$ , at the corner frequency the value of  $\angle G(j\omega)$  is:

- (A)  $-135^\circ$  (B)  $-90^\circ$   
 (C)  $-45^\circ$  (D)  $0^\circ$

- j. If  $r(t)$  is the input and  $x_{1,2}$  are state-variables of the system

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -100 & -20 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 100 \end{bmatrix} r, \text{ then its characteristic equation is:}$$

- (A)  $s^2 + s + 100 = 0$  (B)  $s^2 + s + 20 = 0$   
 (C)  $s^2 - 20s - 100 = 0$  (D)  $s^2 + 20s + 100 = 0$

**Answer any FIVE Questions out of EIGHT Questions.**

**Each question carries 16 marks.**

- Q.2** a. Define the terms: (i) Coulomb friction force (ii) Viscous friction force (iii) Stiction. Why is friction not always undesirable in physical systems? Explain the use of friction in the construction of the dashpot. (3+2+3)
- b. The block-diagram of a speed control system is shown in Fig.4. Define the state variables and write the state and output equations of the system in vector-matrix form. (8)

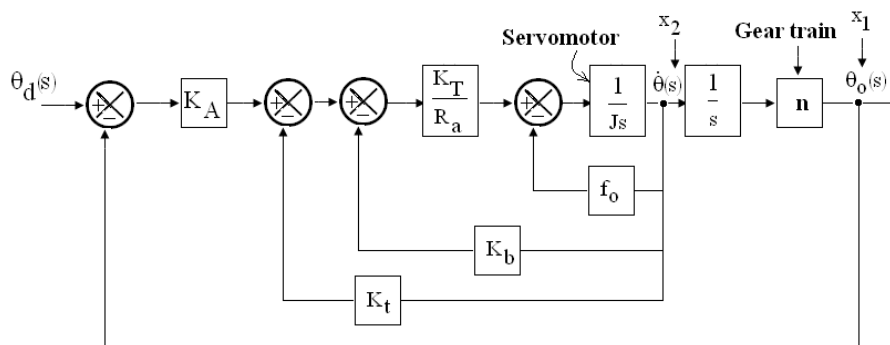


Fig.4

- Q.3** a. Consider the block-diagram of a control system shown in Fig.5. Determine the condition the feed forward compensation  $G_C(s)$  should satisfy to cancel out the effect of disturbance input  $U(s)$  on the output  $C(s)$ .

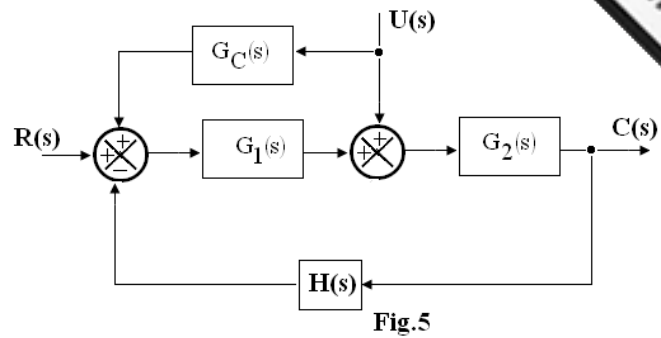


Fig.5

(8)

- b. Draw s-domain signal-flow diagrams for the first-order systems:
- $\dot{x} = ax; x(t=0) = x(0)$
  - $\dot{x} = ax + bu; x(t=0) = x(0)$
  - $\dot{x} = ax + bu; x(t=0) = x(0) = 0; y = cx$

Where  $x$  is the state-variable,  $u$  is the input and  $y$  is the system output. Obtain

the overall transfer function  $T(s) = \frac{Y(s)}{U(s)}$  for case (iii) above. (2×4=8)

- Q.4** a. Determine the sensitivity  $S_{\alpha}^T$  for the system shown in Fig.6. Evaluate  $S_{\alpha}^T$  for  $\omega = 0.1$  and  $1$  rad/s, with  $\alpha = 2$  and  $T(s) = \frac{C(s)}{R(s)}$ . Does the sensitivity increase with frequency?

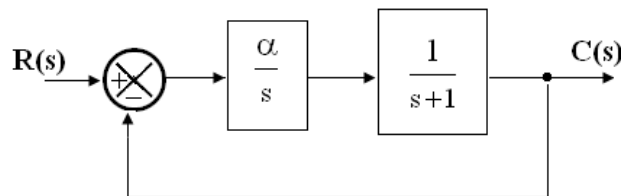


Fig.6

(3+4+1)

- b. Draw the torque characteristics vs pulses/second for a stepper motor, indicating maximum torque, slew range, and pull-out torque. Explain with the help of a diagram, how a stepper motor can be used in closed-loop mode. (4+4)

- Q.5** a. Show that the response  $c(t)$  of a second-order system  $\frac{C(s)}{R(s)} = \frac{K}{Js^2 + Fs + K}$  to unit step input  $r(t) = u(t)$  has a steady-state part and a transient part. Find the value of  $C_{SS}$  for  $\zeta < 1$ . (8)

- b. A unity negative feedback control system has an open-loop transfer function consisting of two poles at  $-0.1$  and  $1$ , two zeros at  $-2$  and  $-1$ , and a variable gain  $K$ . Using Routh-stability criterion, determine the range of values of  $K$  for which the closed-loop system has 0, 1 and 2 poles in the right-half s-plane. (8)

- Q.6** a. Consider the feedback system  $G(s) = K \frac{(s+b)}{s(s+a)}$ ;  $H(s) = 1$ ;  $s = \sigma + j\omega$ . Using the angle criterion for the root-locus prove that  $(\sigma + b)^2 + \omega^2 = (b^2 - ab)$ . Hence, sketch the root-locus, taking  $a = 1$ ,  $b = 2$ . (5+3)

- b. Consider the open-loop transfer function  $G(s)H(s) = \frac{K(s+z)}{s(s^2+2s+2)}$ . At  $K=1$ ,  $z=1$ , there is an open-loop pole-zero cancellation, write the characteristic equation and sketch the root-locus. (8)

- Q.7** a. At any point  $G(j\omega) = x + jy$  on the polar plot of  $G(j\omega)$ , derive the equation of the constant-M circles, identifying the centre and radius. Draw typical family of M-circles with respect to  $-1 + j0$  point on the x-axis. (5+3)
- b. Obtain the sinusoidal transfer-function for the RC filter shown in Fig.7. Hence sketch the polar plot and the inverse polar plot for  $0 \leq \omega \leq \infty$ . (2+3+3)




Fig.7

- Q.8** a. Compare the advantages and applications of phase-lead and phase-lag compensators. (8)

- b. A cascade compensator  $G_C(s) = \frac{s+\alpha}{s}$  is used with a unity negative feedback system  $G(s) = \frac{K}{s+4}$ . Find the values of K and  $\alpha$  to achieve 20% peak-overshoot and 1s settling time. Using these values of K and  $\alpha$ , write the transfer function of the prefilter to cancel out the closed-loop zero. Calculate the steady-state error to unit ramp input. (5+1+2)

- Q.9** a. An intelligent wheelchair is designed to move from place to place avoiding obstacles as shown in Fig.8. Write the canonical state-variable form of the complete system. Draw its block-diagram in state-variable form. (5+3)

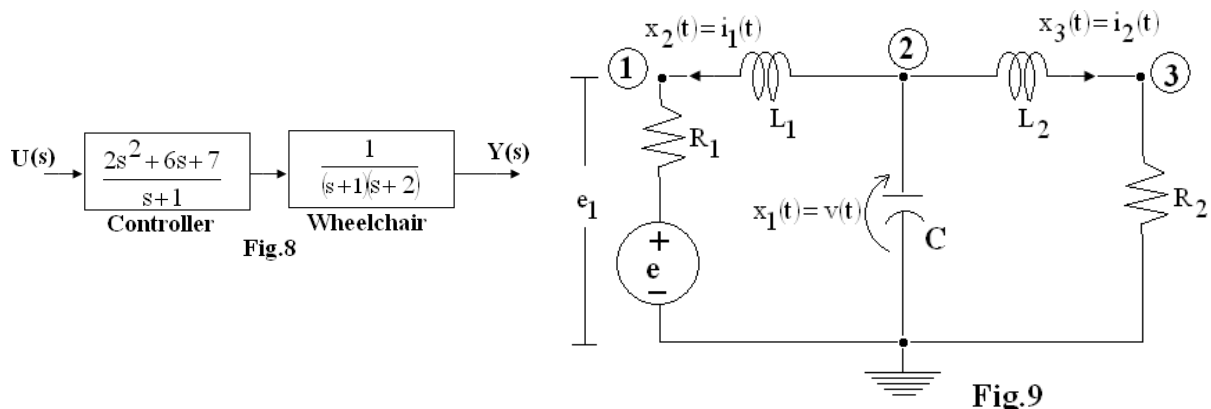


Fig.9

- b. For the electrical system shown in Fig.9,  $x_{1,2,3}$  are the state-variables and  $y_{1,2}$  are output variables representing voltage across and current through  $R_2$ . Derive the state-model of the system. (8)