

DEPARTMENT of ELECTRICAL and ELECTRONIC ENGINEERING
EXAMINATIONS 2004

M.Sc and EEE/ISE PART IV: M.Eng. and ACGI

Solutions 2004

ADVANCED COMMUNICATION THEORY

- There are **FOUR** questions (Q1 to Q4)
- Answer **Question ONE** plus **TWO** other questions.

Comments for Question Q1:

- Question Q1 has 20 multiple choice questions numbered 1 to 20.
- Circle the answers you think are correct on the answer sheet provided.
- There is only one correct answer per question.

Distribution of marks

- Question-1: 40 marks*
- Question-2: 30 marks*
- Question-3: 30 marks*
- Question-4: 30 marks*

The following are provided:


- A table of Fourier Transforms
- A "Gaussian Tail Function" graph

Examiners responsible: Dr. A. Manikas

ANSWER to Q1

- | | | | | | |
|-----|---|---|---|---|---|
| 1) | A | B | C | D | E |
| 2) | A | B | C | D | E |
| 3) | A | B | C | D | E |
| 4) | A | B | C | D | E |
| 5) | A | B | C | D | E |
| 6) | A | B | C | D | E |
| 7) | A | B | C | D | E |
| 8) | A | B | C | D | E |
| 9) | A | B | C | D | E |
| 10) | A | B | C | D | E |
| 11) | A | B | C | D | E |
| 12) | A | B | C | D | E |
| 13) | A | B | C | D | E |
| 14) | A | B | C | D | E |
| 15) | A | B | C | D | E |
| 16) | A | B | C | D | E |
| 17) | A | B | C | D | E |
| 18) | A | B | C | D | E |
| 19) | A | B | C | D | E |
| 20) | A | B | C | D | E |

ANSWER to Q2 (aim: to examine 'Spread Spectrum Theory')

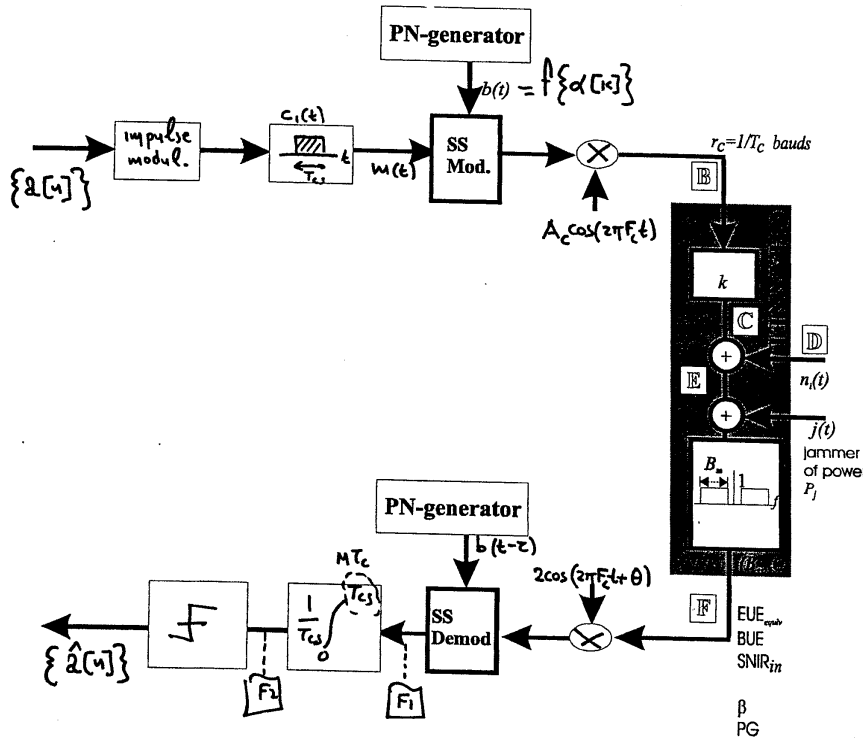

[B] : $s(t) = A_c m(t) \cdot b(t) \cos(2\pi F_c t)$

[F] : desired signal term = $\kappa s(t) = \underbrace{\kappa A_c}_{\sqrt{2P_s}} m(t) b(t) \cos(2\pi F_c t)$

[F1] : desired signal term = $\kappa s(t) \cdot b(t-z) 2\cos(2\pi F_c t + \theta)$
 $= \sqrt{2P_s} m(t) b(t) \cdot b(t-z) 2\cos(2\pi F_c t) \cos(2\pi F_c t + \theta)$

[F2] : desired signal term = $w_0(t) =$
 $= \frac{\sqrt{2P_s}}{T_{cs}} \int_0^{T_{cs}} \underbrace{m(t)}_{\pm 1} \cdot b(t) \cdot b(t-z) \cos \theta \cdot dt$
 $= \pm \frac{\sqrt{2P_s}}{T_{cs}} \cos \theta \int_0^{MT_c} b(t) b(t-z) dt$
 $= \pm \sqrt{2P_s} \cos \theta R_{b,M}(z)$

Power of $w_0(t) = E\{w_0^2(t)\} = 2P_s \cos^2 \theta \cdot E\{R_{b,M}^2(z)\}$
 $= 2P_s \cos^2 \theta (\text{Var}\{R_{b,M}(z)\} + E^2\{R_{b,M}(z)\})$
 $= 2P_s \cos^2 \theta \underbrace{\text{Var}\{R_{b,M}(z)\}}_{\text{code noise power}} + 2P_s \cos^2 \theta \underbrace{E^2\{R_{b,M}(z)\}}_{\text{desired term}}$

1. if $0 \leq \tau \leq T_c$ then power of code noise = $2P_s \cos^2 \theta \text{ var}\{R_{b,M}(\tau)\}$
 $= 2P_s \cos^2 \theta \cdot \frac{1}{M} \left(\frac{\tau}{T_c}\right)^2$
 $= 2P_s \cos^2 \theta \cdot \frac{1}{M} \frac{\tau^2}{T_c^2}$ (note: $M = \frac{T_{cs}}{T_c}$)
 $= 2P_s \cos^2 \theta \frac{1}{T_{cs} T_c} \cdot \tau^2$ 1

2. if $\tau > T_c$ then power of code noise = $2P_s \cos^2 \theta \text{ var}\{R_{b,M}(\tau)\}$
 $= 2P_s \cos^2 \theta \frac{1}{M}$
 $= 2P_s \cos^2 \theta \frac{T_c}{T_{cs}}$ 2

$r_c = 10M \frac{\text{chips}}{\text{sec}} \Rightarrow T_c = 10^{-7}$

$r_b = 1000 \frac{\text{bits}}{\text{sec}} \Rightarrow T_{cs} = 10^{-3}$

$\frac{N_0}{2} = 0.5 \times 10^{-8} \Rightarrow N_0 = 10^{-8}$

EVE = 100 $\Rightarrow \frac{E_b}{N_0} = 10^2 \Rightarrow \frac{P_s T_{cs}}{N_0} = 10^2 \Rightarrow P_s = 10^2 \frac{N_0}{T_{cs}} \Rightarrow P_s = 10^{-3}$

$P_{\text{code noise}} = 1.5 \times 10^{-7}$ 2 $\Rightarrow 1.5 \times 10^{-7} = 2P_s \cos^2 \theta \frac{T_c}{T_{cs}}$
 $\Rightarrow \cos^2 \theta = \frac{1.5 \times 10^{-7} \cdot T_{cs}}{2P_s T_c} \Rightarrow$
 $\Rightarrow \cos^2 \theta = \left(\frac{1.5}{2}\right) = 0.75 \Rightarrow \cos \theta = 0.866$
 $\Rightarrow \theta = 30^\circ$ 30°

$P_{\text{code noise}} = 3.75 \times 10^{-8}$ 1 $\Rightarrow 3.75 \times 10^{-8} = 2P_s \cos^2 \theta \frac{1}{T_{cs} T_c} \tau^2$
 $\Rightarrow \tau^2 = \frac{3.75 \times 10^{-8}}{2 \times 0.75} \Rightarrow \tau = 0.5 \times 10^{-7}$ 0.5 × 10⁻⁷ le τ = 0.5 T_c

ANSWER to Q3 (aim: to examine 'decision rules')

a)

$\Pr(H_0) = \frac{1}{3}$


$\Pr(H_1) = \frac{2}{3}$

i.e. $\text{pdf}_s(s) = \frac{1}{3} \delta(s+2) + \frac{2}{3} \times \frac{1}{4} \times \text{rect} \frac{s-2}{4}$

b)


$$r(t) = s(t) + n(t) \Rightarrow \text{pdf}_r = \text{pdf}_s * \text{pdf}_n$$

where $\text{pdf}_n = \frac{1}{4} \text{rect} \frac{n}{4}$ i.e.

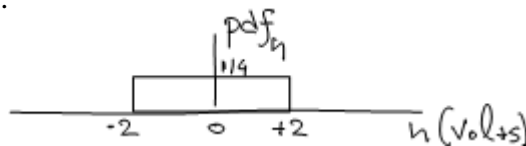


$$\Rightarrow \text{pdf}_r = \underbrace{\frac{1}{3}}_{\Pr(H_0)} \times \underbrace{\frac{1}{4} \text{rect} \frac{r+2}{4}}_{= p_0(r)} + \underbrace{\frac{2}{3}}_{\Pr(H_1)} \times \underbrace{\frac{1}{4} \times \frac{1}{4} \times 4 \Lambda \left(\frac{r-2}{4} \right)}_{= p_1(r)}$$

i.e.

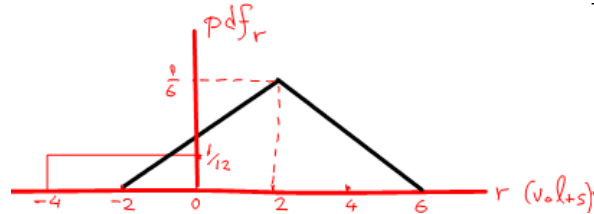

c) likelihood functions (placed together)

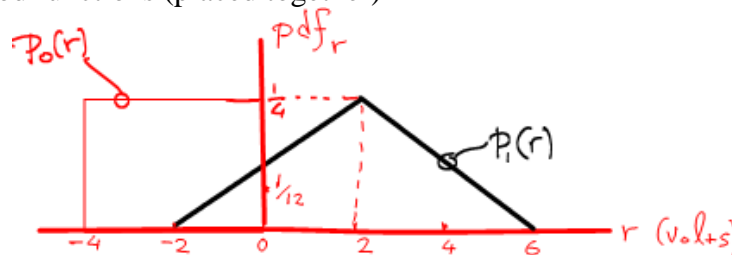


d)

- $p_0(r) = \frac{1}{4} \text{rect} \frac{r+2}{4}$ and $p_1(r) = \frac{1}{4} \Lambda \left(\frac{r-2}{4} \right)$.

- likelihood ratio $= \lambda(r) = \frac{\Lambda \left(\frac{r-2}{4} \right)}{\text{rect} \frac{r+2}{4}}$

- $\lambda_0 = \frac{\Pr(H_0)}{\Pr(H_1)} \cdot \frac{c_{10} - c_{00}}{c_{01} - c_{11}} = \frac{1/3}{2/3} \cdot \frac{0.8}{1} = 0.4$

- Therefore, choose H_1 iff $\lambda(r) > \lambda_0$
 - $\Rightarrow \Lambda\left(\frac{r-2}{4}\right) > 0.4 \text{rect}\frac{r+2}{4}$
 - $\Rightarrow \frac{r+2}{4} > 0.4$
 - $\Rightarrow r > -0.4 \text{Volts}$

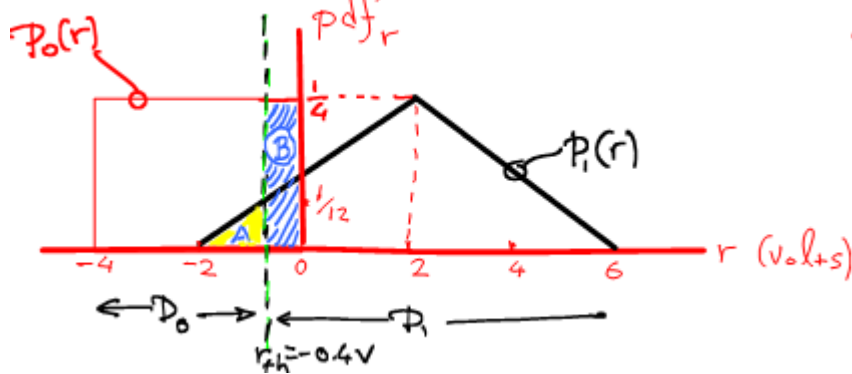

e)

i) $P_{FA} = \Pr(D_1|H_0) = \text{area B} = \frac{1}{4} \times 0.4 = 0.1$

$P_{miss} = \Pr(D_0|H_1) = \text{area A} = \int_{-2}^{-0.4} \frac{1}{4} \frac{r+2}{4} dr = 0.08$

$$\mathbb{F} = \begin{bmatrix} 0.9, & 0.08 \\ 0.1, & 0.92 \end{bmatrix}; \quad \underline{p} = \begin{bmatrix} 1/3 \\ 2/3 \end{bmatrix}$$

ii) $p_e = \Pr(D_1|H_0) \times \Pr(H_0) + \Pr(D_0|H_1) \times \Pr(H_1) = 0.0867$

iii) $\mathbb{J} = \mathbb{F} \cdot \text{diag}(\underline{p}) = \begin{bmatrix} 0.9, & 0.08 \\ 0.1, & 0.92 \end{bmatrix} \begin{bmatrix} 1/3, & 0 \\ 0, & 2/3 \end{bmatrix} = \begin{bmatrix} 0.3, & 0.0533 \\ 0.0333, & 0.6133 \end{bmatrix}$

ANSWER to Q4 (aim: to examine 'DS-CDMA')

$$P = 10mW$$

$$r_b = 500 \text{ kbits/sec} \Rightarrow T_{cs} = \frac{1}{500} \text{ msec}$$

$$K = 201 \text{ users}$$

$$N_o = 2 \times 10^{-9}$$

$$p_e = 3 \times 10^{-5}$$

$$a = 0.375$$

$$s = 1/3$$

$$p_e = \mathbf{T}\{\sqrt{2EUE_{equ}}\} \Rightarrow 3 \times 10^{-5} = \mathbf{T}\{\sqrt{2EUE_{equ}}\}$$

\Rightarrow (using 'tail' graph' supplied)

$$4 = \sqrt{2EUE_{equ}}$$

$$EUE_{equ} = 8$$

However,

$$EUE_{equ} = \frac{E_b}{N_o + N_j}$$

$$\text{where } E_b = PT_{cs} \text{ and } N_j = \frac{(K-1) \cdot P \cdot a \cdot s}{B_{ss}} = \frac{(K-1) \cdot P \cdot a \cdot s}{PG/T_{cs}}$$

Therefore,

$$EUE_{equ} = \frac{PT_{cs}}{N_o + \frac{(K-1) \cdot P \cdot a \cdot s}{PG/T_{cs}}} \Rightarrow \dots\dots\dots$$

$$\Rightarrow PG = \frac{(K-1) \cdot P \cdot a \cdot s \cdot T_{cs}}{\frac{PT_{cs}}{EUE_{equ}} - N_o}$$

$$\Rightarrow \dots \Rightarrow PG = 1000$$