


JUNE 2011**NOTE: There are 9 Questions in all.**

- Question 1 is compulsory and carries 20 marks. Answer to Q.1 must be written in the space provided for it in the answer book supplied and nowhere else.
- The answer sheet for the Q.1 will be collected by the invigilator after 45 Minutes of the commencement of the examination.
- Out of the remaining EIGHT Questions answer any FIVE Questions. Each question carries 16 marks.
- Any required data not explicitly given, may be suitably assumed and stated.

Q.1 Choose the correct or the best alternative in the following: (2×10)


- a. What is the important feature of servomotor?
- (A) Current –voltage characteristics
(B) Speed-current characteristics
(C) Speed-voltage characteristics
(D) Speed-torque characteristics
- b. What is the use of compensation network?
- (A) Improvement in transient response
(B) Improvement in accuracy
(C) Decrease the system error constant
(D) None of the above
- c. The laplace transform of unit step function is
- (A) zero (B) one
(C) 1/s (D) s
- d. What is the phase relationship between reference and control voltage in case of servomotor?
- (A) in phase (B) out of phase 90°
(C) out of phase 180° (D) none of these
- e. If the system has non repeated poles on the $j\omega$ -axis, the system is
- (A) stable (B) unstable
(C) marginally stable (D) Conditionally stable
- f. The transfer function of the given block diagram (Fig.1) is
- (A) s^2+5s+3
(B) $s + \frac{2}{s^2} + 5s + 3$
(C) $\frac{1}{s^3 + 7s^2 + 13s + 6}$
(D) $s^3 + 7s^2 + 13s + \frac{6}{s} + 2$

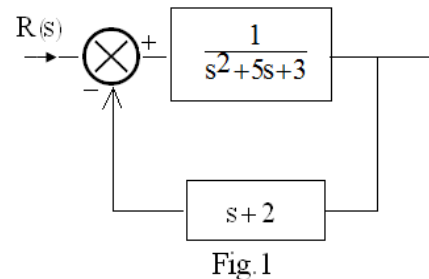


- g. The open loop transfer function has 4 poles and 1 zero. The number of branches of root locus is
- (A) 4 (B) 1
(C) 5 (D) 3
- h. The open loop transfer function of system is $G(s)H(s) = \frac{K(s+2)}{s(s+3)(s+4)}$. Its centroid is at $s =$
- (A) -2.5 (B) -4
(C) -4.5 (D) 0
- i. The eigen values of the state model are the same as the
- (A) closed loop poles (B) open loop poles
(C) both (A) & (B) (D) none of above
- j. An $n \times m$ matrix is said to be non-singular if the rank of the matrix r is
- (A) $r=n$ (B) $r.n$
(C) $r=n/2$ (D) $2n$

Answer any FIVE Questions out of EIGHT Questions.
Each question carries 16 marks.


- Q.2** a. Explain servomechanism with suitable example. (4)
- b. Distinguish between open loop control system and closed loop control system with suitable example. (4)
- c. Draw the mechanical equivalent network, write the system equations and find $F(s)/X_2(s)$ of the system shown in Fig.2. (8)

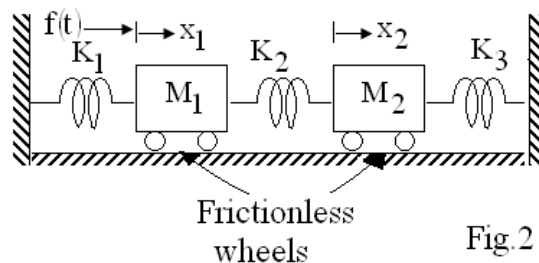

- Q.3** a. Simplify the block diagram (Fig.3) to its minimum and calculate its transfer function. (8)

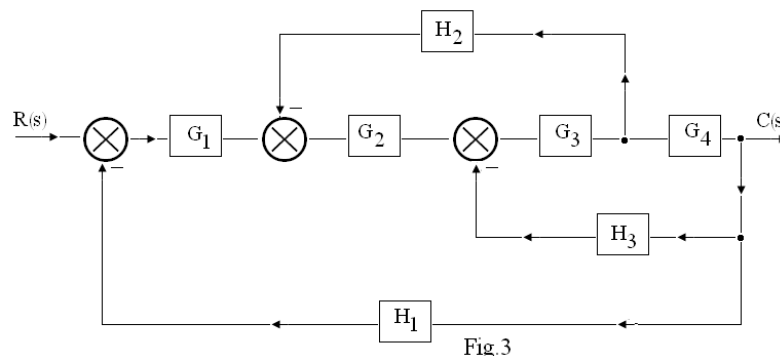

- b. Find the overall transfer function by using Mason's gain formula for the signal flow graph (Fig.4). (8)

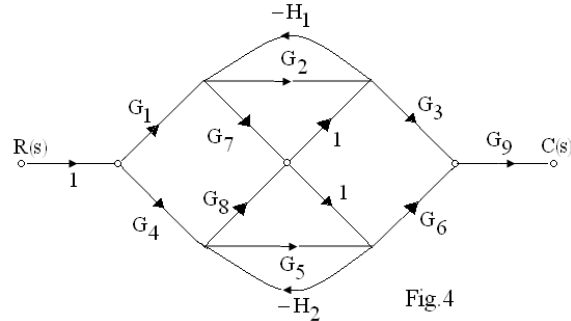


Q.4 a. Explain the working, construction and applications of stepper motor. (3+3+2)

- b. Consider the speed control system of Fig.5 wherein the inner loop corresponds to motor back emf. The controller is an integrator with gain K observes that the load is inertia only.

(i) Determine the value of K for which steady state error to unit ramp input ($V_r(s)=1/s^2$) is less than 0.01rad/sec.

(ii) For the value of K found in part (i) determine, the sensitivity S_K^T , $T(s)=w(s)/V_r(s)$. What will be the limiting value of S_K^T at low frequencies?(8)

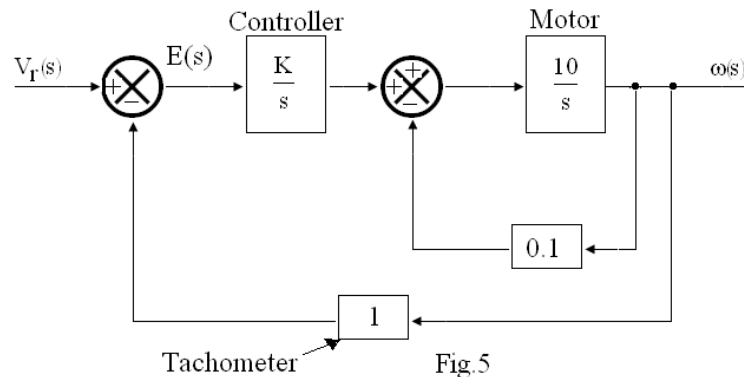

Q.5 a. A system has open loop transfer function as $G(s)H(s)=\frac{10}{s(s+5)}$. Find the

undamped natural frequency, the damping ratio, the damped natural frequency, rise time, peak time, peak overshoot and the settling time with 2% criterion.(8)

- b. For unity feedback system, system is marginally stable and oscillates with frequency rad/sec. Find K_{mar} and 'q'

$$G(s)H(s)=\frac{4}{s(s^2+qs+2K)} \quad (8)$$

Q.6 a. The loop transfer function of a unit feedback control system is

$$G(s)H(s)=\frac{K}{s(s+2)(s+5)} \cdot \text{Sketch the root locus of the system and determine}$$

the value of K. (8)

- b. Sketch the root loci for the unity feedback system with $G(s) = \frac{K(s)}{s(s+a)}$
Assume $b > a$. (8)

- Q.7** a. Sketch the Nyquist plot for a system with

$$G(s)H(s) = \frac{10(s+1)}{(2s+1)(1+0.1s)(1+0.02s)}$$

Draw Nyquist plot and find stability (condition for stable). (8)

- b. The open loop transfer function of a unit feedback control system is

$$G(s)H(s) = \frac{170\left(\frac{s}{10} + 1\right)}{s\left(1 + \frac{s}{1.75}\right)\left(1 + \frac{s}{60}\right)}$$

Sketch the bode plot of the system and determine (i) gain margin (ii) phase margin (iii) closed loop stability. (8)

- Q.8** a. The loop transfer function of a unity feedback control system is $G(s) = \frac{10}{s(s+1)}$

Design a lead compensator such that the closed loop system will satisfy the following specifications:

Static velocity error constant = 20sec

Phase margin = 50°

Gain margin $\geq 10\text{dB}$ (10)

- b. Explain in brief what do you understand by phase lead compensator. Write effects and limitations of phase lead compensator. (6)

- Q.9** a. Obtain the transfer function of the given state equation:

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ -1 & -1 & 0 \\ 1 & 0 & 0 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix} u$$

$$y = \begin{bmatrix} x_1 & x_2 & x_3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} \quad (8)$$

- b. Consider the vector matrix differential equation as

$$\dot{x} = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix} x$$

Obtain the transition matrix. (8)