

Surname		Other Names	
Centre Number		Candidate Number	
Candidate Signature			

Leave blank
-------------

General Certificate of Education  
 June 2005  
 Advanced Subsidiary Examination



**PHYSICS (SPECIFICATION A) PHA3/W**  
**Unit 3 Current Electricity and Elastic Properties of Solids**

Friday 10 June 2005 Morning Session

**In addition to this paper you will require:**

- a calculator;
- a pencil and a ruler.

For Examiner's Use			
Number	Mark	Number	Mark
1			
2			
3			
4			
5			
Total (Column 1)	→		
Total (Column 2)	→		
TOTAL			
Examiner's Initials			

Time allowed: 1 hour

**Instructions**

- Use blue or black ink or ball-point pen.
- Fill in the boxes at the top of this page.
- Answer **all** questions in the spaces provided. All working must be shown.
- Do all rough work in this book. Cross through any work you do not want marked.

**Information**

- The maximum mark for this paper is 50.
- Mark allocations are shown in brackets.
- The paper carries 25% of the total marks for Physics Advanced Subsidiary and carries 12½% of the total marks for Physics Advanced.
- A *Data Sheet* is provided on pages 3 and 4. You may wish to detach this perforated sheet at the start of the examination.
- You are expected to use a calculator where appropriate.
- In questions requiring description and explanation you will be assessed on your ability to use an appropriate form and style of writing, to organise relevant information clearly and coherently, and to use specialist vocabulary where appropriate. The degree of legibility of your handwriting and the level of accuracy of your spelling, punctuation and grammar will also be taken into account.

**Data Sheet**

- A perforated *Data Sheet* is provided as pages 3 and 4 of this question paper.
- This sheet may be useful for answering some of the questions in the examination.
- You may wish to detach this sheet before you begin work.

Fundamental constants and values				Mechanics and Applied Physics		Fields, Waves, Quantum Phenomena	
Quantity	Symbol	Value	Units				
speed of light in vacuo	$c$	$3.00 \times 10^8$	$\text{m s}^{-1}$	$v = u + at$	$g = \frac{F}{m}$		
permeability of free space	$\mu_0$	$4\pi \times 10^{-7}$	$\text{H m}^{-1}$	$s = \left(\frac{u+v}{2}\right)t$	$g = -\frac{GM}{r^2}$		
permittivity of free space	$\epsilon_0$	$8.85 \times 10^{-12}$	$\text{F m}^{-1}$	$s = ut + \frac{at^2}{2}$	$g = -\frac{\Delta V}{\Delta x}$		
charge of electron	$e$	$1.60 \times 10^{-19}$	C	$v^2 = u^2 + 2as$	$V = -\frac{GM}{r}$		
the Planck constant	$h$	$6.63 \times 10^{-34}$	J s	$F = \frac{\Delta(mv)}{\Delta t}$	$a = -(2\pi f)^2 x$		
gravitational constant	$G$	$6.67 \times 10^{-11}$	$\text{N m}^2 \text{kg}^{-2}$	$P = Fv$	$v = \pm 2\pi f \sqrt{A^2 - x^2}$		
the Avogadro constant	$N_A$	$6.02 \times 10^{23}$	$\text{mol}^{-1}$	$\text{efficiency} = \frac{\text{power output}}{\text{power input}}$	$x = A \cos 2\pi ft$		
molar gas constant	$R$	8.31	$\text{J K}^{-1} \text{mol}^{-1}$	$\omega = \frac{v}{r} = 2\pi f$	$T = 2\pi \sqrt{\frac{m}{k}}$		
the Boltzmann constant	$k$	$1.38 \times 10^{-23}$	$\text{J K}^{-1}$	$a = \frac{v^2}{r} = r\omega^2$	$T = 2\pi \sqrt{\frac{l}{g}}$		
the Stefan constant	$\sigma$	$5.67 \times 10^{-8}$	$\text{W m}^{-2} \text{K}^{-4}$	$I = \sum mr^2$	$\lambda = \frac{\omega s}{D}$		
the Wien constant	$\alpha$	$2.90 \times 10^{-3}$	m K	$E_k = \frac{1}{2} I\omega^2$	$d \sin \theta = n\lambda$		
electron rest mass	$m_e$	$9.11 \times 10^{-31}$	kg	$\omega_2 = \omega_1 + at$	$\theta = \frac{\lambda}{D}$		
(equivalent to $5.5 \times 10^{-4}u$ )				$\theta = \omega_1 t + \frac{1}{2} at^2$	${}_1n_2 = \frac{\sin \theta_1}{\sin \theta_2} = \frac{c_1}{c_2}$		
electron charge/mass ratio	$e/m_e$	$1.76 \times 10^{11}$	$\text{C kg}^{-1}$	$\omega_2^2 = \omega_1^2 + 2\alpha\theta$	${}_1n_2 = \frac{n_2}{n_1}$		
proton rest mass	$m_p$	$1.67 \times 10^{-27}$	kg	$\theta = \frac{1}{2} (\omega_1 + \omega_2)t$	$\sin \theta_c = \frac{1}{n}$		
(equivalent to 1.00728u)				$T = I\alpha$	$E = hf$		
proton charge/mass ratio	$e/m_p$	$9.58 \times 10^7$	$\text{C kg}^{-1}$	<i>angular momentum</i> = $I\omega$	$hf = \phi + E_k$		
neutron rest mass	$m_n$	$1.67 \times 10^{-27}$	kg	$W = T\theta$	$hf = E_1 - E_2$		
(equivalent to 1.00867u)				$P = T\omega$	$\lambda = \frac{h}{p} = \frac{h}{mv}$		
gravitational field strength	$g$	9.81	$\text{N kg}^{-1}$	<i>angular impulse</i> = change of angular momentum = $Tt$	$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$		
acceleration due to gravity	$g$	9.81	$\text{m s}^{-2}$	$\Delta Q = \Delta U + \Delta W$			
atomic mass unit	$u$	$1.661 \times 10^{-27}$	kg	$\Delta W = p\Delta V$			
(1u is equivalent to 931.3 MeV)				$pV^\gamma = \text{constant}$			
<b>Fundamental particles</b>				<i>work done per cycle</i> = area of loop	<b>Electricity</b>		
<i>Class</i>	<i>Name</i>	<i>Symbol</i>	<i>Rest energy</i>	<i>input power</i> = calorific value $\times$ fuel flow rate	$\epsilon = \frac{E}{Q}$		
			/MeV	<i>indicated power</i> as (area of $p-V$ loop) $\times$ (no. of cycles/s) $\times$ (no. of cylinders)	$\epsilon = I(R+r)$		
photon	photon	$\gamma$	0	<i>friction power</i> = indicated power - brake power	$\frac{1}{R_T} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \dots$		
lepton	neutrino	$\nu_e$	0	<i>efficiency</i> = $\frac{W}{Q_{in}} = \frac{Q_{in} - Q_{out}}{Q_{in}}$	$R_T = R_1 + R_2 + R_3 + \dots$		
		$\nu_\mu$	0	<i>maximum possible efficiency</i> = $\frac{T_H - T_C}{T_H}$	$P = I^2 R$		
	electron	$e^\pm$	0.510999		$E = \frac{F}{Q} = \frac{V}{d}$		
	muon	$\mu^\pm$	105.659		$E = \frac{1}{4\pi\epsilon_0} \frac{Q}{r^2}$		
mesons	pion	$\pi^\pm$	139.576		$E = \frac{1}{2} QV$		
		$\pi^0$	134.972		$F = BIl$		
	kaon	$K^\pm$	493.821		$F = BQv$		
		$K^0$	497.762		$Q = Q_0 e^{-t/RC}$		
baryons	proton	$p$	938.257		$\Phi = BA$		
	neutron	$n$	939.551				
<b>Properties of quarks</b>							
<i>Type</i>	<i>Charge</i>	<i>Baryon number</i>	<i>Strangeness</i>				
u	$+\frac{2}{3}$	$+\frac{1}{3}$	0				
d	$-\frac{1}{3}$	$+\frac{1}{3}$	0				
s	$-\frac{1}{3}$	$+\frac{1}{3}$	-1				
<b>Geometrical equations</b>							
<i>arc length</i> = $r\theta$							
<i>circumference of circle</i> = $2\pi r$							
<i>area of circle</i> = $\pi r^2$							
<i>area of cylinder</i> = $2\pi rh$							
<i>volume of cylinder</i> = $\pi r^2 h$							
<i>area of sphere</i> = $4\pi r^2$							
<i>volume of sphere</i> = $\frac{4}{3} \pi r^3$							

$$\text{magnitude of induced e.m.f.} = N \frac{\Delta\Phi}{\Delta t}$$

$$I_{\text{rms}} = \frac{I_0}{\sqrt{2}}$$

$$V_{\text{rms}} = \frac{V_0}{\sqrt{2}}$$

### Mechanical and Thermal Properties

$$\text{the Young modulus} = \frac{\text{tensile stress}}{\text{tensile strain}} = \frac{F l}{A e}$$

$$\text{energy stored} = \frac{1}{2} Fe$$

$$\Delta Q = mc \Delta\theta$$

$$\Delta Q = ml$$

$$pV = \frac{1}{3} Nmc^2$$

$$\frac{1}{2} mc^2 = \frac{3}{2} kT = \frac{3RT}{2N_A}$$

### Nuclear Physics and Turning Points in Physics

$$\text{force} = \frac{eV_p}{d}$$

$$\text{force} = Bev$$

$$\text{radius of curvature} = \frac{mv}{Be}$$

$$\frac{eV}{d} = mg$$

$$\text{work done} = eV$$

$$F = 6\pi\eta rv$$

$$I = k \frac{I_0}{x^2}$$

$$\frac{\Delta N}{\Delta t} = -\lambda N$$

$$\lambda = \frac{h}{\sqrt{2}meV}$$

$$N = N_0 e^{-\lambda t}$$

$$T_{\frac{1}{2}} = \frac{\ln 2}{\lambda}$$

$$R = r_0 A^{\frac{1}{3}}$$

$$E = mc^2 = \frac{m_0 c^2}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$$

$$l = l_0 \left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}$$

$$t = \frac{t_0}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$$

### Astrophysics and Medical Physics

Body	Mass/kg	Mean radius/m
Sun	$2.00 \times 10^{30}$	$7.00 \times 10^8$
Earth	$6.00 \times 10^{24}$	$6.40 \times 10^6$

$$1 \text{ astronomical unit} = 1.50 \times 10^{11} \text{ m}$$

$$1 \text{ parsec} = 206265 \text{ AU} = 3.08 \times 10^{16} \text{ m} = 3.26 \text{ ly}$$

$$1 \text{ light year} = 9.45 \times 10^{15} \text{ m}$$

$$\text{Hubble constant } (H) = 65 \text{ kms}^{-1} \text{ Mpc}^{-1}$$

$$M = \frac{\text{angle subtended by image at eye}}{\text{angle subtended by object at unaided eye}}$$

$$M = \frac{f_o}{f_c}$$

$$m - M = 5 \log \frac{d}{10}$$

$$\lambda_{\text{max}} T = \text{constant} = 0.0029 \text{ m K}$$

$$v = Hd$$

$$P = \sigma AT^4$$

$$\frac{\Delta f}{f} = \frac{v}{c}$$

$$\frac{\Delta \lambda}{\lambda} = -\frac{v}{c}$$

$$R_s \approx \frac{2GM}{c^2}$$

### Medical Physics

$$\text{power} = \frac{1}{f}$$

$$\frac{1}{u} + \frac{1}{v} = \frac{1}{f} \text{ and } m = \frac{v}{u}$$

$$\text{intensity level} = 10 \log \frac{I}{I_0}$$

$$I = I_0 e^{-\mu x}$$

$$\mu_m = \frac{\mu}{\rho}$$

### Electronics

#### Resistors

Preferred values for resistors (E24)  
Series: 1.0 1.1 1.2 1.3 1.5 1.6 1.8 2.0 2.2 2.4 2.7 3.0 3.3 3.6 3.9 4.3 4.7 5.1 5.6 6.2 6.8 7.5 8.2 9.1 ohms  
and multiples that are ten times greater

$$Z = \frac{V_{\text{rms}}}{I_{\text{rms}}}$$

$$\frac{1}{C_T} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \dots$$

$$C_T = C_1 + C_2 + C_3 + \dots$$

$$X_C = \frac{1}{2\pi f C}$$

### Alternating Currents

$$f = \frac{1}{T}$$

### Operational amplifier

$$G = \frac{V_{\text{out}}}{V_{\text{in}}} \quad \text{voltage gain}$$

$$G = -\frac{R_f}{R_1} \quad \text{inverting}$$

$$G = 1 + \frac{R_f}{R_1} \quad \text{non-inverting}$$

$$V_{\text{out}} = -R_f \left( \frac{V_1}{R_1} + \frac{V_2}{R_2} + \frac{V_3}{R_3} \right) \quad \text{summing}$$

Answer **all** questions.

1 (a) A set of decorative lights consists of a string of lamps. Each lamp is rated at 5.0 V, 0.40 W and is connected in series to a 230 V supply.

Calculate

(i) the number of lamps in the set, so that each lamp operates at the correct rating,

.....  
.....

(ii) the current in the circuit,

.....  
.....

(iii) the resistance of each lamp,

.....  
.....

(iv) the total electrical energy transferred by the set of lights in 2 hours.

.....  
.....  
.....

(5 marks)

(b) When assembled at the factory, one set of lights inadvertently contains 10 lamps too many. All are connected in series. Assume that the resistance of each lamp is the same as that calculated in part (a) (iii).

(i) Calculate the current in this set of lights when connected to a 230 V supply.

.....  
.....  
.....

(ii) How would the brightness of each lamp in this set compare with the brightness of each lamp in the correct set?

.....

(3 marks)

2 (a) A student is given three resistors of resistance  $3.0\ \Omega$ ,  $4.0\ \Omega$  and  $6.0\ \Omega$  respectively.

(i) Draw the arrangement, using all three resistors, which will give the largest resistance.

(ii) Calculate the resistance of the arrangement you have drawn.

.....  
.....


(iii) Draw the arrangement, using all three resistors, which will give the smallest resistance.

(iv) Calculate the resistance of the arrangement you have drawn.

.....  
.....  
.....

(5 marks)

- (b) The three resistors are now connected to a battery of emf 12 V and negligible internal resistance, as shown in **Figure 1**.

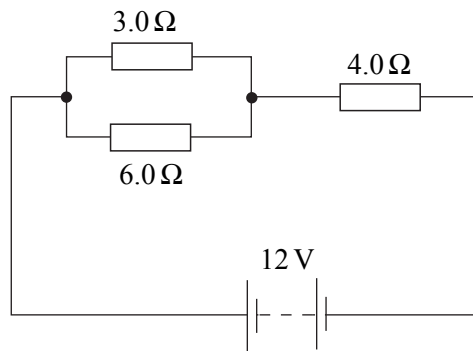

**Figure 1**

- (i) Calculate the total resistance in the circuit.

.....  
 .....

- (ii) Calculate the voltage across the 6.0Ω resistor.

.....  
 .....


(4 marks)

9

**TURN OVER FOR THE NEXT QUESTION**

Turn over ►

- 3 (a) In the circuit shown in **Figure 2**, the battery has an emf of 6.0 V. With the switch closed and the lamp lit, the reading on the voltmeter is 5.4 V.

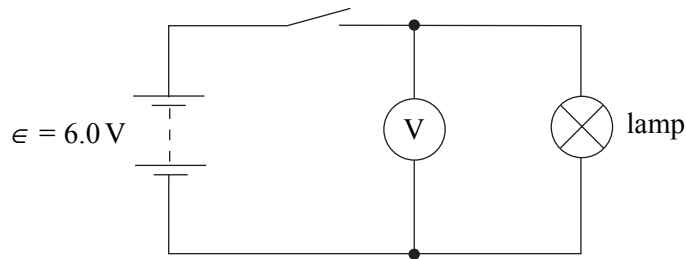

**Figure 2**

Explain without calculation, why the voltmeter reading is less than the emf of the battery.

You may be awarded marks for the quality of written communication in your answer.

.....

.....

.....

.....

(3 marks)

- (b) A torch is powered by two identical cells each having an emf of 1.5 V and an internal resistance  $r$ . The cells are connected in series. The torch bulb is rated at 1.6 W and the voltage across it is 2.5 V.

(i) Draw the circuit described.

(ii) Calculate the internal resistance of each cell.

.....

.....


.....

.....

(5 marks)




- (c) In the circuit in **Figure 3** the cell has emf  $\epsilon$  and internal resistance  $r$ . The voltage  $V$  across the cell is read on the voltmeter which has infinite resistance, and the current  $I$  through the variable resistor  $R$  is read on the ammeter.

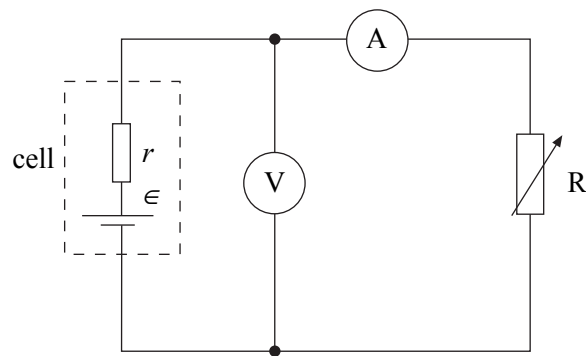

**Figure 3**

By altering the value of the variable resistor  $R$ , a set of values of  $V$  and  $I$  is obtained. These values, when plotted, give the graph shown in **Figure 4**.

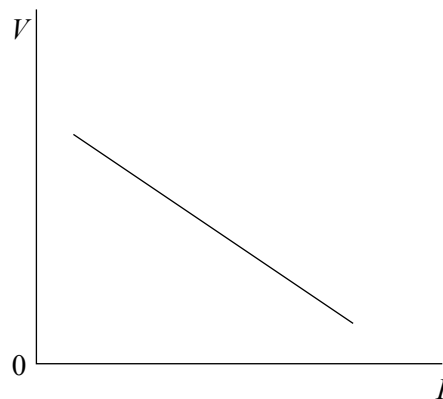

**Figure 4**

Show how the values of  $\epsilon$  and  $r$  may be obtained from this graph. Explain your method.

.....

.....


.....

.....

.....

(3 marks)

- 4 The graph shows how the current through a thermistor varies with the potential difference across it.

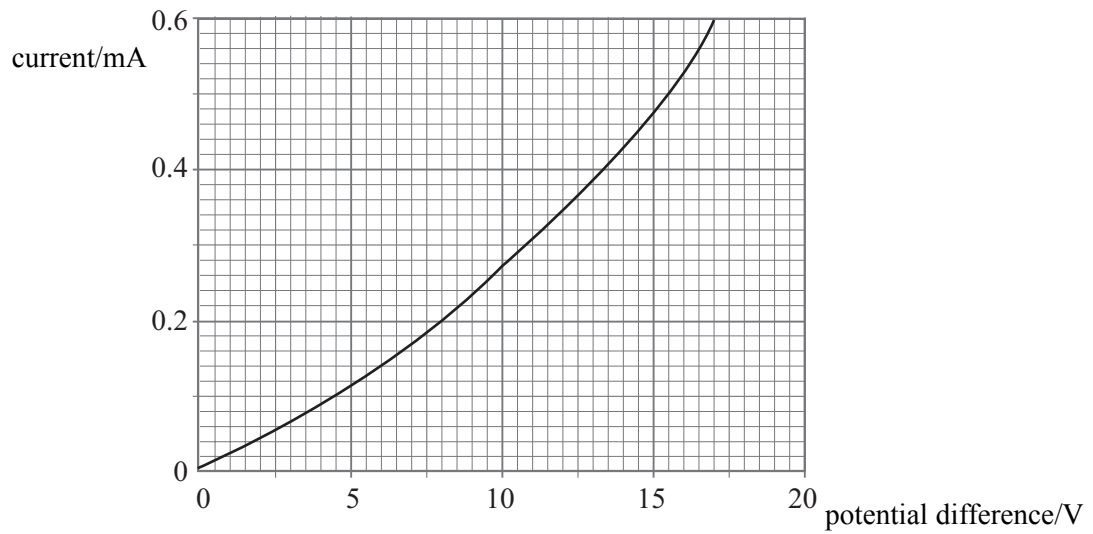

- (a) Draw the circuit of an experimental arrangement which could be used to collect the data necessary to produce this graph. On your circuit diagram label clearly a component which would enable the current to be changed continuously across the range.

(4 marks)

- (b) (i) Using information obtained from the graph, calculate the resistances of the thermistor when the current is 0.10 mA and also when the current is 0.60 mA.

.....  
.....  
.....

- (ii) Using the results of part (b) (i) deduce how the resistance of the thermistor changes as its **temperature** increases.

You may be awarded marks for the quality of written communication in your answer.

.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....

(5 marks)

9

**TURN OVER FOR THE NEXT QUESTION**


**Turn over ▶**

- 5 (a) State *Hooke's law* for a material in the form of a wire and state the conditions under which this law applies.

.....  
.....

(2 marks)

- (b) A length of steel wire and a length of brass wire are joined together. This combination is suspended from a fixed support and a force of 80 N is applied at the bottom end, as shown in **Figure 5**.

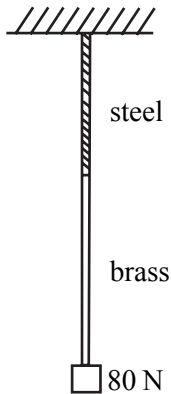

**Figure 5**

Each wire has a cross-sectional area of  $2.4 \times 10^{-6} \text{ m}^2$ .

- length of the steel wire = 0.80 m
- length of the brass wire = 1.40 m
- the Young modulus for steel =  $2.0 \times 10^{11} \text{ Pa}$
- the Young modulus for brass =  $1.0 \times 10^{11} \text{ Pa}$

- (i) Calculate the total extension produced when the force of 80 N is applied.

.....  
.....  
.....  
.....  
.....  
.....

(ii) Show that the mass of the combination wire =  $4.4 \times 10^{-2}$  kg.

$$\text{density of steel} = 7.9 \times 10^3 \text{ kg m}^{-3}$$

$$\text{density of brass} = 8.5 \times 10^3 \text{ kg m}^{-3}$$

.....

.....

.....

.....

.....

(7 marks)

(c) A single brass wire has the same mass and the same cross-sectional area as the combination wire described in part (b). Calculate its length.

.....

.....

.....

.....

.....

(2 marks)

**QUALITY OF WRITTEN COMMUNICATION** (2 marks)

**END OF QUESTIONS**

11

2

**THERE ARE NO QUESTIONS PRINTED ON THIS PAGE**

**THERE ARE NO QUESTIONS PRINTED ON THIS PAGE**

**THERE ARE NO QUESTIONS PRINTED ON THIS PAGE**