

Surname						Other Names					
Centre Number						Candidate Number					
Candidate Signature											

For Examiner's Use
--------------------

General Certificate of Education  
 June 2008  
 Advanced Level Examination



**PHYSICS (SPECIFICATION A)**  
**Unit 9 Nuclear Instability: Electronics Option**

**PHA9/W**

Wednesday 11 June 2008 9.00 am to 10.15 am

<p><b>For this paper you must have:</b></p> <ul style="list-style-type: none"> <li>• a calculator</li> <li>• a pencil and a ruler</li> <li>• a data sheet loose insert.</li> </ul>
--

Time allowed: 1 hour 15 minutes

**Instructions**

- Use black ink or black ball-point pen.
- Fill in the boxes at the top of this page.
- Answer **all** questions.
- You must answer questions in the spaces provided. Answers written in margins or on blank pages will not be marked.
- Show all your working.
- Do all rough work in this book. Cross through any work you do not want to be marked.

**Information**

- The maximum mark for this paper is 40. This includes up to two marks for the Quality of Written Communication.
- The marks for questions are shown in brackets.
- A *Data Sheet* is provided as a loose insert to this question paper.
- You are expected to use a calculator where appropriate.
- Question 1(c) and 5(b) should be answered in continuous prose. In these questions you will be marked on your ability to use good English, to organise information clearly and to use specialist vocabulary where appropriate.

For Examiner's Use			
Question	Mark	Question	Mark
1			
2			
3			
4			
5			
Total (Column 1) →			
Total (Column 2) →			
Quality of Written Communication			
TOTAL			
Examiner's Initials			



## SECTION A: NUCLEAR INSTABILITY

Answer **all** of this question.

- 1 (a) An isotope of technetium  ${}^{99}_{43}\text{Tc}^m$ , which is in a metastable state, decays emitting only  $\gamma$  rays. When the isotope is placed 20 cm from a  $\gamma$  ray detector the count rate is 25 counts per second. The background count rate is 120 counts per minute. Calculate the count rate, in counts per second, when the detector is placed 30 cm from the isotope.

.....

.....

.....

.....

.....

.....

.....

.....

(3 marks)

- 1 (b) (i) Calculate the approximate radius of a nucleus of  ${}^{99}_{43}\text{Tc}^m$ , given that the nuclear radius of  ${}^{28}_{14}\text{Si}$  is  $3.7 \times 10^{-15}$  m.

.....

.....

.....

.....

.....

- 1 (b) (ii) State **one** method by which the nuclear radius of  ${}^{28}_{14}\text{Si}$  could be determined experimentally.

.....

(4 marks)



1 (c) Explain why sources of  $\beta$  radiation often also produce  $\gamma$  rays of discrete frequencies.

You may be awarded additional marks to those shown in brackets for the quality of written communication in your answer to part (c).

.....

.....

.....

.....

.....

.....

.....

(3 marks)

<b>10</b>


**Turn over for the next question**

**Turn over ▶**



**SECTION B: ELECTRONICS**Answer **all** questions.

- 2 **Figure 1** shows a half-wave rectified power supply. The transformer in the power supply has a peak output of 3.0 V at a frequency of 50 Hz. The power supply is connected to a  $68\ \Omega$  load resistor. The pd across the load resistor is displayed on an oscilloscope.

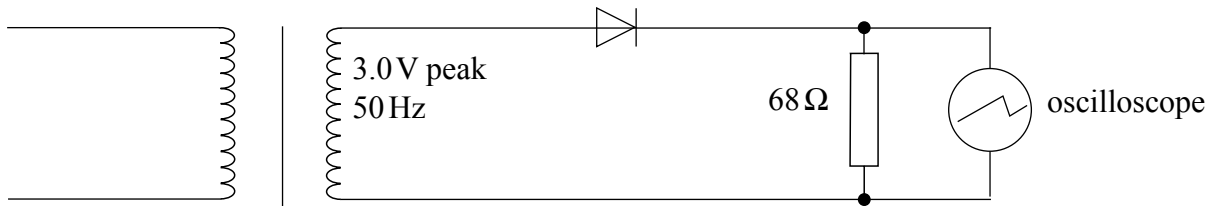**Figure 1**

- 2 (a) Explain why the peak voltage across the load resistor is about 2.3 V.

.....


.....

.....

*(1 mark)*

- 2 (b) The oscilloscope was set to a voltage sensitivity of  $1\ \text{V cm}^{-1}$  and a time base of  $5\ \text{ms cm}^{-1}$ .

Draw on the grid the trace that would be seen on the oscilloscope.

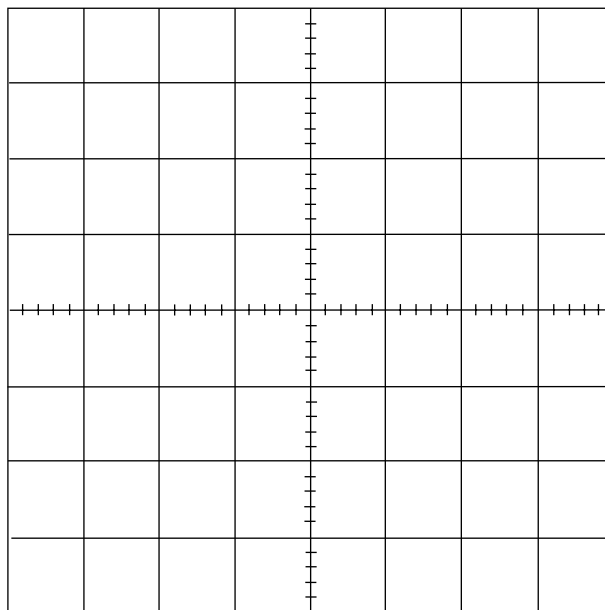*(2 marks)*

- 2 (c) A smoothing capacitor is to be added to the circuit. The use of a capacitor of capacitance  $22\mu\text{F}$  is suggested for this circuit. Explain, using appropriate calculations, the suitability of such a capacitor.

.....

.....

.....


.....

.....

(3 marks)

- 2 (d) A student attempts to set up a half-wave rectification circuit, but uses a wrong component, **X** as shown in **Figure 2**.

Figure 2

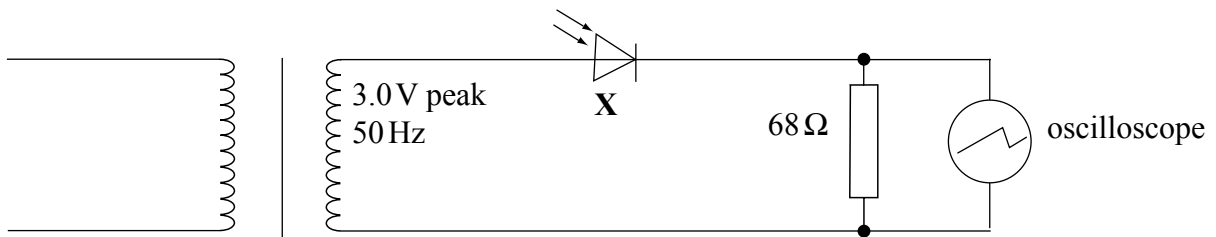

- 2 (d) (i) Name the component **X**.....

Explain how the properties of **X** affect the rectification produced by the circuit when **X** is

- 2 (d) (ii) in the dark,

.....

.....

.....

- 2 (d) (iii) illuminated by bright light.

.....

.....

.....

(3 marks)



3 A capacitor is marked 25 V, 0.1 mF.

3 (a) Explain why this capacitor should **not** be connected to a 24 V rms ac supply.

.....  
.....  
.....  
.....

(2 marks)

3 (b) Calculate the reactance of this capacitor when connected to a 50 Hz ac supply.

.....  
.....  
.....  
.....

(1 mark)

3 (c) Apart from cost, give **two** disadvantages of an electrolytic capacitor compared with a mica capacitor with the same capacitance.

disadvantage 1.....  
.....  
.....

disadvantage 2.....  
.....  
.....

(2 marks)

5



4 (a) Draw a non-inverting voltage amplifier circuit containing an operational amplifier. The amplifier circuit is required to have a voltage gain of +50. Give suitable values for the components required.

(5 marks)

4 (b) The *bandwidth* of an amplifier increases when *negative feedback* is used. Explain the terms:

bandwidth.....

.....

.....

negative feedback.....

.....

.....

(2 marks)


7

Turn over ▶




- 5 The circuit shown in **Figure 3** operates a temperature indicator on the front of a freezer. The switching temperature for the indicator is  $-5^{\circ}\text{C}$ .

**Figure 3**

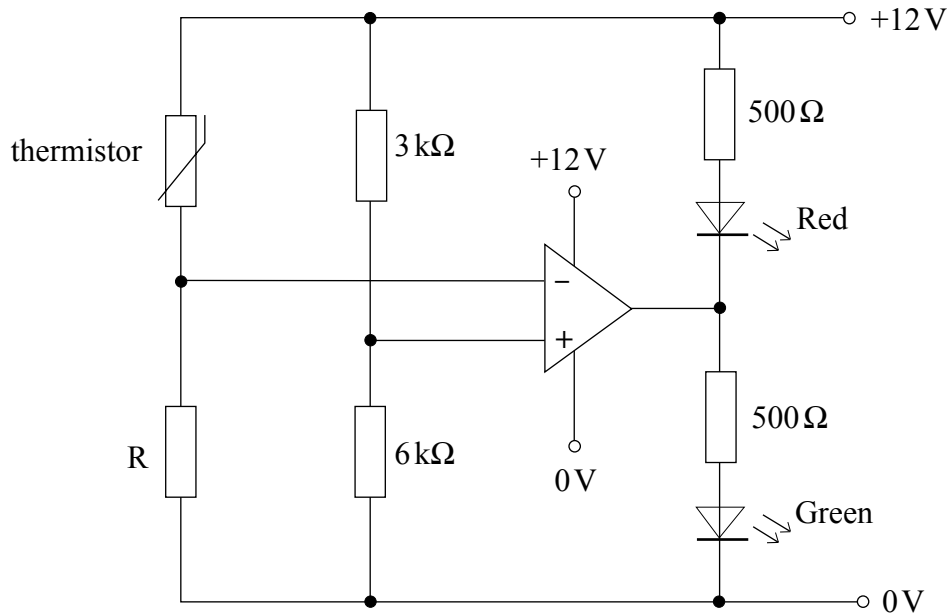

The graph shows how the resistance of the thermistor varies with the temperature.

resistance/ $\Omega$

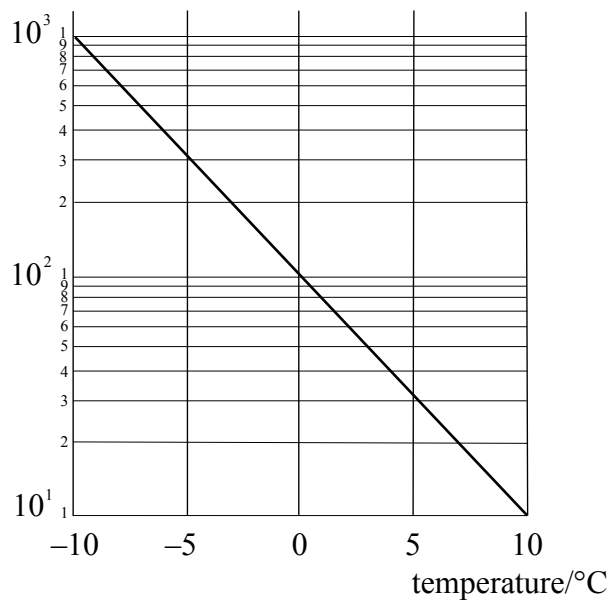



- 5 (a) Calculate the resistance of the resistor, R, which would cause the switching temperature to be  $-5^{\circ}\text{C}$ .

.....  
.....  
.....  
.....

(2 marks)

- 5 (b) Explain the state of the two LEDs at a temperature of  $-10^{\circ}\text{C}$ .

You may be awarded additional marks to those shown in brackets for the quality of written communication in your answers.

.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....

(3 marks)

- 5 (c) When the red LED is on, the voltage across it is 1.6 V.

- 5 (c) (i) Calculate the current through its  $500\ \Omega$  current limiting resistor.

.....  
.....  
.....  
.....

Turn over ►



5 (c) (ii) The  $500\Omega$  resistor has a power rating of  $0.125\text{ W}$ . The student is concerned that this may not be high enough. Show by calculation that this is **not** a suitable resistor.

.....  
.....  
.....  
.....

(2 marks)

7

**Quality of Written Communication** (2 marks)

2

**END OF QUESTIONS**



**There are no questions printed on this page**

**DO NOT WRITE ON THIS PAGE  
ANSWER IN THE SPACES PROVIDED**



**There are no questions printed on this page**

**DO NOT WRITE ON THIS PAGE  
ANSWER IN THE SPACES PROVIDED**

Copyright © 2008 AQA and its licensors. All rights reserved.



**PHYSICS (SPECIFICATION A)**

**PHA9W**

**Unit 9 Nuclear Instability: Electronics Option**

**Data Sheet**

Fundamental constants and values				Mechanics and Applied Physics		Fields, Waves, Quantum Phenomena	
Quantity	Symbol	Value	Units				
speed of light in vacuo	$c$	$3.00 \times 10^8$	$\text{m s}^{-1}$	$v = u + at$	$g = \frac{F}{m}$		
permeability of free space	$\mu_0$	$4\pi \times 10^{-7}$	$\text{H m}^{-1}$	$s = \left(\frac{u+v}{2}\right)t$	$g = -\frac{GM}{r^2}$		
permittivity of free space	$\epsilon_0$	$8.85 \times 10^{-12}$	$\text{F m}^{-1}$	$s = ut + \frac{at^2}{2}$	$g = -\frac{\Delta V}{\Delta x}$		
charge of electron	$e$	$1.60 \times 10^{-19}$	$\text{C}$	$v^2 = u^2 + 2as$	$V = -\frac{GM}{r}$		
the Planck constant	$h$	$6.63 \times 10^{-34}$	$\text{J s}$	$F = \frac{\Delta(mv)}{\Delta t}$	$a = -(2\pi f)^2 x$		
gravitational constant	$G$	$6.67 \times 10^{-11}$	$\text{N m}^2 \text{kg}^{-2}$	$P = Fv$	$v = \pm 2\pi f \sqrt{A^2 - x^2}$		
the Avogadro constant	$N_A$	$6.02 \times 10^{23}$	$\text{mol}^{-1}$	$\text{efficiency} = \frac{\text{power output}}{\text{power input}}$	$x = A \cos 2\pi ft$		
molar gas constant	$R$	8.31	$\text{J K}^{-1} \text{mol}^{-1}$	$\omega = \frac{v}{r} = 2\pi f$	$T = 2\pi \sqrt{\frac{m}{k}}$		
the Boltzmann constant	$k$	$1.38 \times 10^{-23}$	$\text{J K}^{-1}$	$a = \frac{v^2}{r} = r\omega^2$	$T = 2\pi \sqrt{\frac{l}{g}}$		
the Stefan constant	$\sigma$	$5.67 \times 10^{-8}$	$\text{W m}^{-2} \text{K}^{-4}$	$I = \sum mr^2$	$\lambda = \frac{\omega s}{D}$		
the Wien constant	$a$	$2.90 \times 10^{-3}$	$\text{m K}$	$E_k = \frac{1}{2} I\omega^2$	$d \sin \theta = n\lambda$		
electron rest mass	$m_e$	$9.11 \times 10^{-31}$	$\text{kg}$	$\omega_2 = \omega_1 + at$	$\theta \approx \frac{\lambda}{D}$		
(equivalent to $5.5 \times 10^{-4} \text{u}$ )				$\theta = \omega_1 t + \frac{1}{2} at^2$	${}^1n_2 = \frac{\sin \theta_1}{\sin \theta_2} = \frac{c_1}{c_2}$		
electron charge/mass ratio	$e/m_e$	$1.76 \times 10^{11}$	$\text{C kg}^{-1}$	$\omega_2^2 = \omega_1^2 + 2a\theta$	${}^1n_2 = \frac{n_2}{n_1}$		
proton rest mass	$m_p$	$1.67 \times 10^{-27}$	$\text{kg}$	$\theta = \frac{1}{2} (\omega_1 + \omega_2)t$	$\sin \theta_c = \frac{1}{n}$		
(equivalent to 1.00728u)				$T = I\alpha$	$E = hf$		
proton charge/mass ratio	$e/m_p$	$9.58 \times 10^7$	$\text{C kg}^{-1}$	$\text{angular momentum} = I\omega$	$hf = \phi + E_k$		
neutron rest mass	$m_n$	$1.67 \times 10^{-27}$	$\text{kg}$	$W = T\theta$	$hf = E_1 - E_2$		
(equivalent to 1.00867u)				$P = T\omega$	$\lambda = \frac{h}{p} = \frac{h}{mv}$		
gravitational field strength	$g$	9.81	$\text{N kg}^{-1}$	$\text{angular impulse} = \text{change of angular momentum} = Tt$	$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$		
acceleration due to gravity	$g$	9.81	$\text{m s}^{-2}$	$\Delta Q = \Delta U + \Delta W$			
atomic mass unit	$u$	$1.661 \times 10^{-27}$	$\text{kg}$	$\Delta W = p\Delta V$			
(1u is equivalent to 931.3 MeV)				$pV^\gamma = \text{constant}$			
<b>Fundamental particles</b>				$\text{work done per cycle} = \text{area of loop}$	<b>Electricity</b>		
<i>Class</i>	<i>Name</i>	<i>Symbol</i>	<i>Rest energy</i>	$\text{input power} = \text{calorific value} \times \text{fuel flow rate}$	$\epsilon = \frac{E}{Q}$		
			/MeV	$\text{indicated power as (area of } p-V \text{ loop)} \times (\text{no. of cycles/s}) \times (\text{no. of cylinders})$	$\epsilon = I(R + r)$		
photon	photon	$\gamma$	0	$\text{friction power} = \text{indicated power} - \text{brake power}$	$\frac{1}{R_T} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \dots$		
lepton	neutrino	$\nu_e$	0	$\text{efficiency} = \frac{W}{Q_{in}} = \frac{Q_{in} - Q_{out}}{Q_{in}}$	$R_T = R_1 + R_2 + R_3 + \dots$		
		$\nu_\mu$	0	$\text{maximum possible efficiency} = \frac{T_H - T_C}{T_H}$	$P = I^2 R$		
	electron	$e^\pm$	0.510999		$E = \frac{F}{Q} = \frac{V}{d}$		
	muon	$\mu^\pm$	105.659		$E = \frac{1}{4\pi\epsilon_0} \frac{Q}{r^2}$		
mesons	pion	$\pi^\pm$	139.576		$E = \frac{1}{2} QV$		
		$\pi^0$	134.972		$F = BI$		
	kaon	$K^\pm$	493.821		$F = BQv$		
		$K^0$	497.762		$Q = Q_0 e^{-t/RC}$		
baryons	proton	$p$	938.257		$\Phi = BA$		
	neutron	$n$	939.551				
<b>Properties of quarks</b>							
<i>Type</i>	<i>Charge</i>	<i>Baryon number</i>	<i>Strangeness</i>				
u	$+\frac{2}{3}$	$+\frac{1}{3}$	0				
d	$-\frac{1}{3}$	$+\frac{1}{3}$	0				
s	$-\frac{1}{3}$	$+\frac{1}{3}$	-1				
<b>Geometrical equations</b>							
arc length = $r\theta$							
circumference of circle = $2\pi r$							
area of circle = $\pi r^2$							
area of cylinder = $2\pi rh$							
volume of cylinder = $\pi r^2 h$							
area of sphere = $4\pi r^2$							
volume of sphere = $\frac{4}{3}\pi r^3$							

Turn over ►

$$\text{magnitude of induced emf} = N \frac{\Delta\Phi}{\Delta t}$$

$$I_{\text{rms}} = \frac{I_0}{\sqrt{2}}$$

$$V_{\text{rms}} = \frac{V_0}{\sqrt{2}}$$

### Mechanical and Thermal Properties

$$\text{the Young modulus} = \frac{\text{tensile stress}}{\text{tensile strain}} = \frac{F}{A} \frac{l}{e}$$

$$\text{energy stored} = \frac{1}{2} Fe$$

$$\Delta Q = mc \Delta\theta$$

$$\Delta Q = ml$$

$$pV = \frac{1}{3} Nmc^2$$

$$\frac{1}{2} mc^2 = \frac{3}{2} kT = \frac{3RT}{2N_A}$$

### Nuclear Physics and Turning Points in Physics

$$\text{force} = \frac{eV_p}{d}$$

$$\text{force} = Bev$$

$$\text{radius of curvature} = \frac{mv}{Be}$$

$$\frac{eV}{d} = mg$$

$$\text{work done} = eV$$

$$F = 6\pi\eta rv$$

$$I = k \frac{I_0}{x^2}$$

$$\frac{\Delta N}{\Delta t} = -\lambda N$$

$$\lambda = \frac{h}{\sqrt{2}meV}$$

$$N = N_0 e^{-\lambda t}$$

$$T_{\frac{1}{2}} = \frac{\ln 2}{\lambda}$$

$$R = r_0 A^{\frac{1}{3}}$$

$$E = mc^2 = \frac{m_0 c^2}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$$

$$l = l_0 \left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}$$

$$t = \frac{t_0}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$$

### Astrophysics and Medical Physics

Body	Mass/kg	Mean radius/m
Sun	$2.00 \times 10^{30}$	$7.00 \times 10^8$
Earth	$6.00 \times 10^{24}$	$6.40 \times 10^6$

$$1 \text{ astronomical unit} = 1.50 \times 10^{11} \text{ m}$$

$$1 \text{ parsec} = 206265 \text{ AU} = 3.08 \times 10^{16} \text{ m} = 3.26 \text{ ly}$$

$$1 \text{ light year} = 9.45 \times 10^{15} \text{ m}$$

$$\text{Hubble constant } (H) = 65 \text{ kms}^{-1} \text{ Mpc}^{-1}$$

$$M = \frac{\text{angle subtended by image at eye}}{\text{angle subtended by object at unaided eye}}$$

$$M = \frac{f_o}{f_e}$$

$$m - M = 5 \log \frac{d}{10}$$

$$\lambda_{\text{max}} T = \text{constant} = 0.0029 \text{ m K}$$

$$v = Hd$$

$$P = \sigma AT^4$$

$$\frac{\Delta f}{f} = \frac{v}{c}$$

$$\frac{\Delta \lambda}{\lambda} = -\frac{v}{c}$$

$$R_s \approx \frac{2GM}{c^2}$$

### Medical Physics

$$\text{power} = \frac{1}{f}$$

$$\frac{1}{u} + \frac{1}{v} = \frac{1}{f} \text{ and } m = \frac{v}{u}$$

$$\text{intensity level} = 10 \log \frac{I}{I_0}$$

$$I = I_0 e^{-\mu x}$$

$$\mu_m = \frac{\mu}{\rho}$$

### Electronics

Resistors

Preferred values for resistors (E24)  
Series: 1.0 1.1 1.2 1.3 1.5 1.6 1.8 2.0 2.2  
2.4 2.7 3.0 3.3 3.6 3.9 4.3 4.7 5.1 5.6 6.2  
6.8 7.5 8.2 9.1 ohms  
and multiples that are ten times greater

$$Z = \frac{V_{\text{rms}}}{I_{\text{rms}}}$$

$$\frac{1}{C_T} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \dots$$

$$C_T = C_1 + C_2 + C_3 + \dots$$

$$X_C = \frac{1}{2\pi fC}$$

### Alternating Currents

$$f = \frac{1}{T}$$

### Operational amplifier

$$G = \frac{V_{\text{out}}}{V_{\text{in}}} \text{ voltage gain}$$

$$G = -\frac{R_f}{R_1} \text{ inverting}$$

$$G = 1 + \frac{R_f}{R_1} \text{ non-inverting}$$

$$V_{\text{out}} = -R_f \left( \frac{V_1}{R_1} + \frac{V_2}{R_2} + \frac{V_3}{R_3} \right) \text{ summing}$$