



Rewarding Learning

General Certificate of Secondary Education
2024

Centre Number

--	--	--	--	--

Candidate Number

--	--	--	--

Engineering and Manufacturing

Unit 3
assessing
Materials, Processes and Systems

MV18

[GEM31]
THURSDAY 6 JUNE, MORNING

Time

2 hours, plus your additional time allowance.

Instructions to Candidates

Write your Centre Number and Candidate Number in the spaces provided at the top of this page.

You must answer the questions in the spaces provided.

Do not write on blank pages.

Questions which require drawing or sketching should be completed using an H.B. pencil.

All other questions must be completed using black ink only.

Answer **all** questions in Sections **A** and **B**.

Questions 1, 2, 3, 4 and 5 of Section A refer to the pre-release material, a copy of which has been provided for you.

Quality of written communication will be assessed in Question **5**.

You may use a calculator for this paper.

Information for Candidates

The total mark for this paper is **100**.

Figures in brackets printed at the end of each question indicate the marks awarded to each question or part question.


Answer all questions

Section A

Questions in this section refer to the pre-release material.

- 1 (a) The mechanism shown in **Fig. 1** is used in the scroll saw to control the motion of the saw blade.

Fig. 1

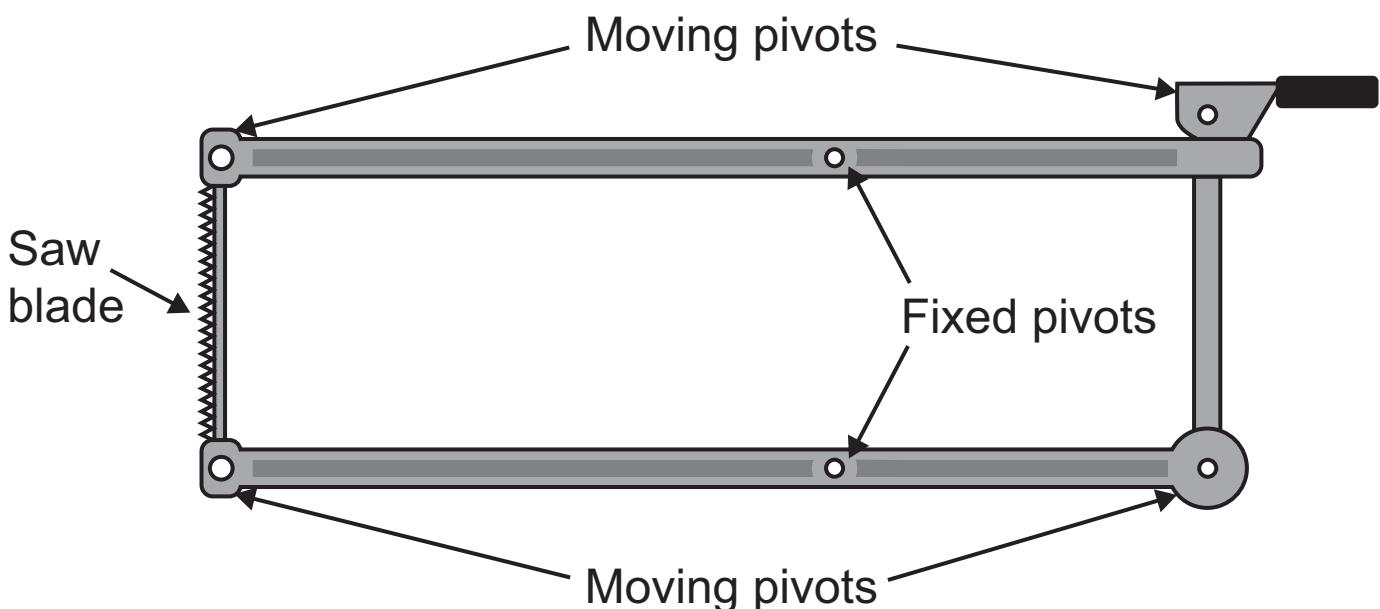


- (i) State the type of mechanism shown in **Fig. 1**.
[1 mark]

- (ii) Explain why aluminium alloy has been used to manufacture the mechanism in the scroll saw shown in **Fig. 1**. [2 marks]

- (b)** The cross section of the top and bottom members of the mechanism is shown below in **Fig. 2**.

Fig. 2

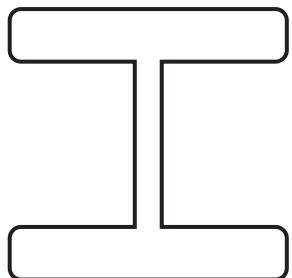

- (i)** The cross section shown in **Fig. 2** has been used in the design of the mechanism shown in **Fig. 1** to increase its stiffness.
Explain the meaning of the term stiffness.
[2 marks]

- (ii)** A range of fixtures are used in the manufacture of the scroll saw.

What is the function of a fixture? [1 mark]

(c) Parts of the scroll saw are made using the process of pressure die casting.

Produce an annotated sketch, showing the main features of the pressure die casting process.

[4 marks]

Blank Page

2 (a) The electronic components of the scroll saw have been encased in a nylon housing.

- (i) State **one** property of nylon which makes it a suitable material for the casing for the electronic components. [1 mark]

- (ii) Name the most suitable process that could be used to produce the nylon housing for the electronic components. [1 mark]


- (iii) State **two** safety precautions which the user should employ when using the scroll saw.

[1 mark for each]

1. _____
2. _____

(b) The results of a tensile test shows stress / strain curves for materials used in the manufacture of the scroll saw as shown in **Fig. 3**.

Fig. 3

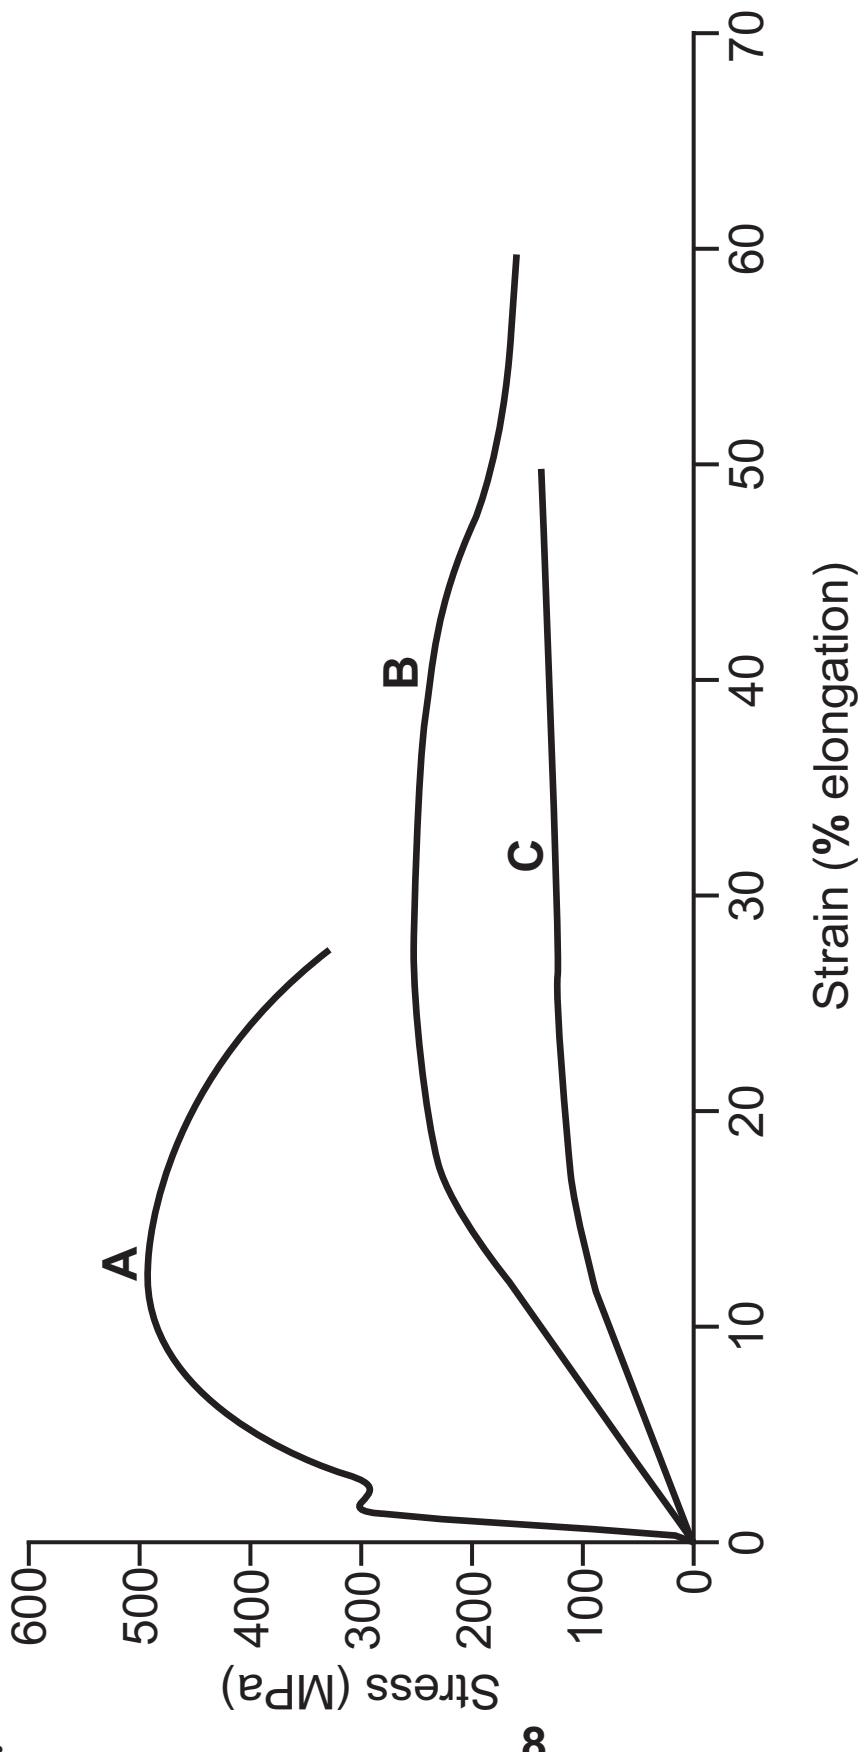

- (i) Complete **Table 1** below by suggesting materials used in the manufacture of the scroll saw that would produce the stress / strain curves shown in **Fig. 3.** [3 marks]

Table 1

Stress / Strain curve	Material
A	
B	
C	

- (ii) The samples used in the tensile tests were all equal length and cross section. If the initial length of the samples was **80 mm**, what was the length of sample **B** at the point of fracture? [1 mark]

Answer _____ mm

- 3 (a)** The company has calculated it spends £8000 on energy, £470 on materials and £430 on labour costs to produce a batch of 2000 aluminium alloy saw tables for the scroll saw.

In order to reduce costs the company changes the material to a low melting point aluminium alloy which will reduce energy costs by 15% but will increase material costs by 20%, labour costs remain at £430.

By how much will the cost of each saw table be reduced? [7 marks]

Show your working out in the space below.

Answer _____

(b) The company manufactures the scroll saw table using the pressure die casting process from 5 kg blocks of aluminium alloy as raw material. Each saw table casting has a volume of 120 cm^3 .

Given that aluminium alloy has a density of 2.7 g/cm^3 , calculate how many scroll saw tables can be produced from one 5 kg block. [3 marks]

Show your working out in the space below.


Answer _____ Scroll saw tables

Blank Page

(Questions continue overleaf)

4 Fig. 4 shows the high carbon steel blade fitted to the scroll saw.

Fig. 4

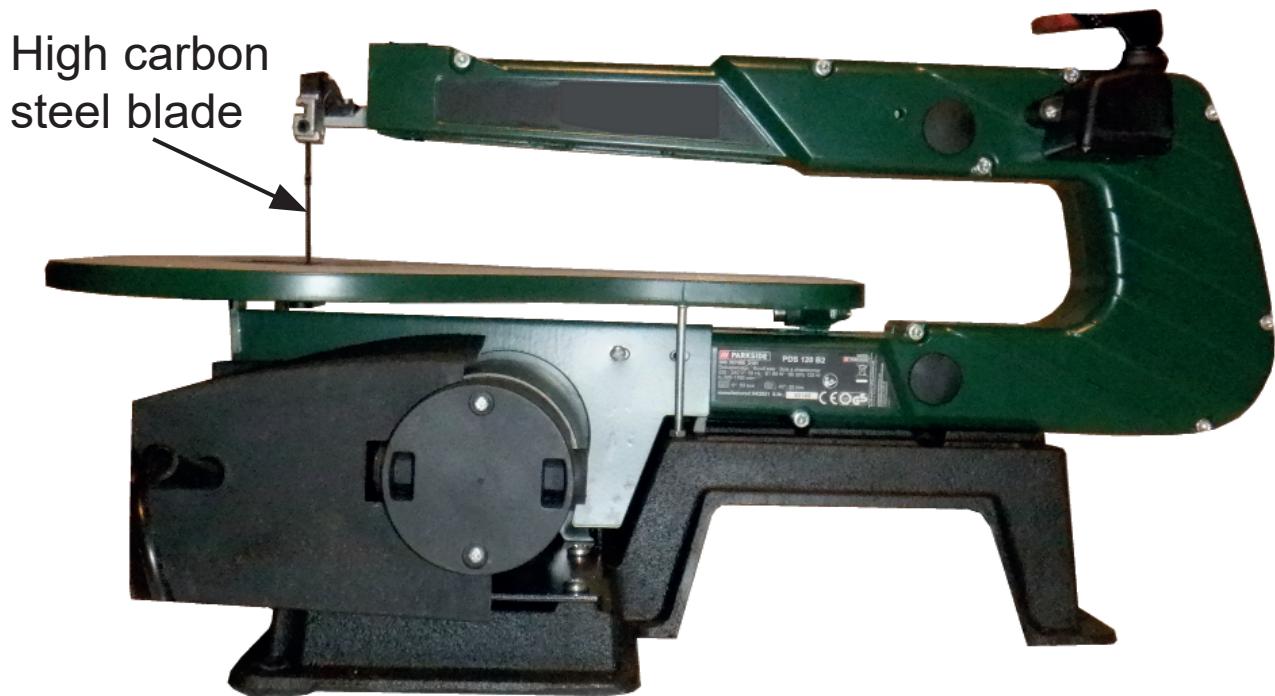

In the space provided, use 2D, assembly and exploded annotated sketches, with appropriate terminology, to show how the scroll saw blade may be fitted to the top and bottom members of the scroll saw.

[4 marks each] will be awarded for:

- Detail contained in the sketches
- Quality of sketches
- Annotation

Show your response to Question 4 in the space below.




- 5** Discuss the advantages and disadvantages that a manufacturer of scroll saws should consider before implementing computer-aided design (CAD), computer-aided manufacturing (CAM) and robotics into their production system. [10 marks]

Quality of written communication will be assessed in this question.

Section B

- 6 (a) Complete **Table 2** by inserting the correct name for each symbol or component. [4 marks]

Table 2

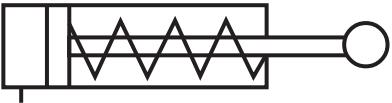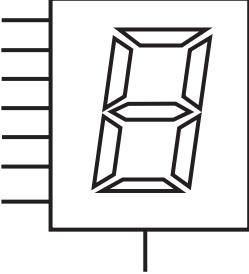Symbol or Component	Symbol or Component Name
	
	
	
	

(b) Shape-memory alloys (SMAs) are smart materials.

- (i)** Explain the key features of shape-memory alloys (SMAs) and give **one** application for their use.
[2 marks for explanation, 1 mark for application]

Explanation

Application


- (ii)** Smart materials are used in industrial projects.
Briefly explain **two** benefits of using smart materials.
[2 marks]

1. _____

2. _____

- 7 Fig. 5 shows an aluminium block of a component part for a project to be machined in a school workshop.

Fig. 5

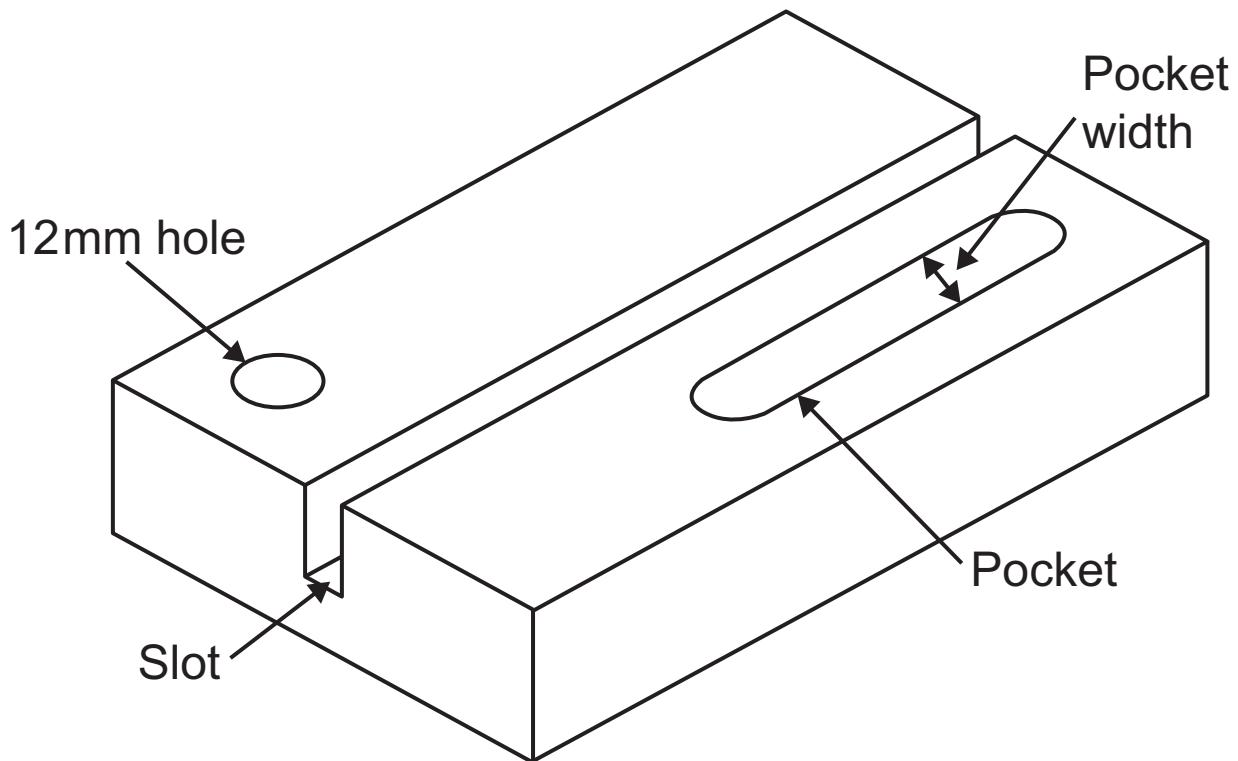

- (a) (i) Suggest a suitable school workshop machine which could be used to produce the slot in the aluminium block. [1 mark]

- (ii) Explain with reference to hand tools how the 12 mm hole would be marked out ready for drilling. [2 marks]

- (b) (i)** Suggest a suitable tool which could measure the depth of the pocket. [1 mark]
-

- (ii)** Suggest a suitable tool which could measure the width of the pocket. [1 mark]
-

- (c)** Tolerances and quality control charts are used when manufacturing products.

- (i)** Give **two** reasons for the use of tolerances in the manufacture of a product. [2 marks]



1. _____

2. _____

- (ii)** Explain how a quality control chart could be used in the design and manufacture of a product.
[2 marks]
-
-
-

8 (a) Complete **Table 3** by inserting the correct material forming process, joining method or the type of joint for each image shown. [4 marks]

Table 3

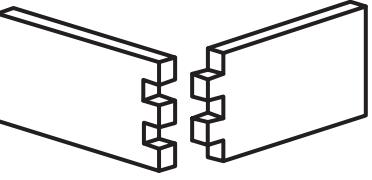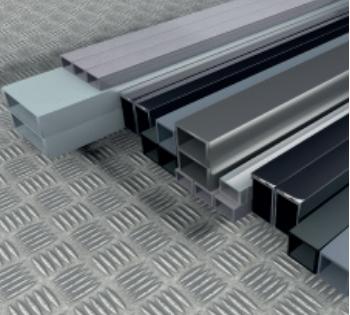Product	Material	
	Cast iron	Material forming process
	Steel	Joining method
	Oak	Type of joint
	Aluminium alloy	Material forming process

(b) Give **two** reasons why cast iron is a suitable material for the metalwork vice shown in **Table 3** opposite.
[2 marks]

1. _____

2. _____


(c) The cast iron metal work vice shown in **Table 3** is to be manufactured using mass production.
Give **two** characteristics associated with mass production. [2 marks]

1. _____


2. _____

- 9 Fig. 6 shows a typical garden railing made from mild steel. The vertical railings are available in solid bar in either a square section or triangular section but in different stock lengths as shown.

Fig. 6

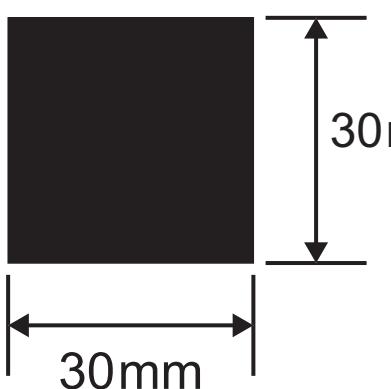

Stock length = 4m

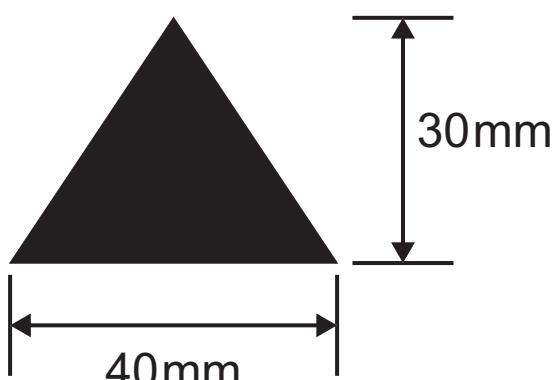

Stock length = 3.5m

(a) Using the information from **Fig. 6**, calculate the difference in cm^3 between the volume of mild steel in one stock length of square section material compared to the volume of mild steel in one stock length of triangular section material. [3 marks]

Difference in volume_____ cm^3

(b) A length of square section mild steel 4 m long is to be cut into 500 mm lengths using a circular saw.

Given that a 3 mm length of material is lost with each saw cut, calculate the length of material left over after the maximum number of 500 mm lengths has been cut.
[3 marks]

Left over material _____ mm


Blank Page

(Questions continue overleaf)

- (c) The company manufactures the hoop top railing panels shown in Fig. 7 using 10 mm round mild steel bar costing £32.00 per 6.4 m length.

After cutting each length of round mild steel bar, a piece of material 896 mm long was left over.

Fig. 7

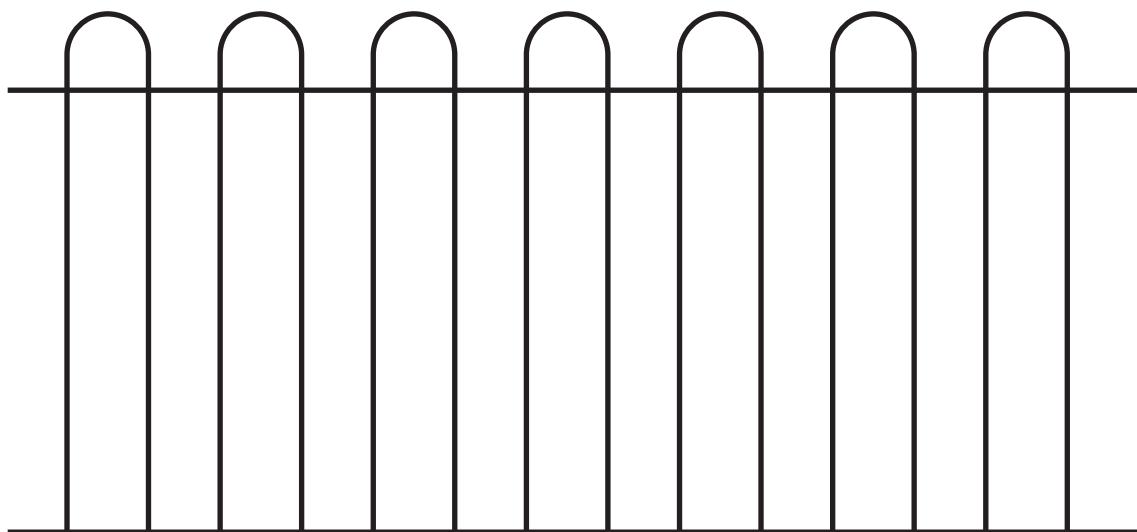

- (i) Calculate the cost per metre for the round mild steel bar. [1 mark]

Answer _____

(ii) Calculate the percentage of left over material from each 6.4 m length. [1 mark]

Answer _____ %

**(iii) Calculate the cost of the left over material.
[1 mark]**

Answer _____

10 Fig. 8 shows a design for a children's play park frame.

Fig. 8



(a) The manufacturing processes to be used to manufacture the play park frame and the anticipated loads when in use after installation require a ductile material.

(i) Explain the meaning of ductility as a mechanical property of a material. [2 marks]

The manufacture of the play park frame involves heat treatments to reduce brittleness in the welded joints.

(ii) Explain the meaning of brittleness as a mechanical property of a material. [2 marks]

When installed in the park any load applied to the play park frame under normal use should be within the elastic limit of the material.

(iii) Explain the term elastic limit. [2 marks]

(b) Outdoor play park frames such as the one shown in Fig. 8 are usually galvanised before being painted.

Explain the process of galvanising which would be used on the outdoor play park frame. [3 marks]

11 A company that designs and manufactures circuit boards made reference to pick and place machines, new and emerging technologies and computer-aided engineering (CAE).

(a) Briefly outline **two** advantages that pick and place machines offer manufacturers. [2 marks]

(b) Explain the impact that new and emerging technologies in the design and manufacture of products can have on reducing energy costs. [2 marks]

(c) Explain how computer-aided engineering (CAE) is used in manufacturing. [2 marks]

This is the end of the question paper

SOURCES

All images © CCEA unless otherwise stated

Q8(a) . . . © Getty Images

Q9 . . . © Getty Images

Q10. . . . © Getty Images

For Examiner's use only	
Question Number	Marks
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
Total Marks	
Examiner Number	

Permission to reproduce all copyright material has been applied for.

In some cases, efforts to contact copyright holders may have been unsuccessful and CCEA will be happy to rectify any omissions of acknowledgement in future if notified.



Rewarding Learning

General Certificate of Secondary Education
2024

Engineering and Manufacturing

Unit 3

assessing

Materials, Processes and Systems

MV18

[GEM31]

Pre-Release Material

Released January 2024
for Examination Summer 2024

Fig. 1 and Fig. 2 show an electric scroll saw.

Fig. 1


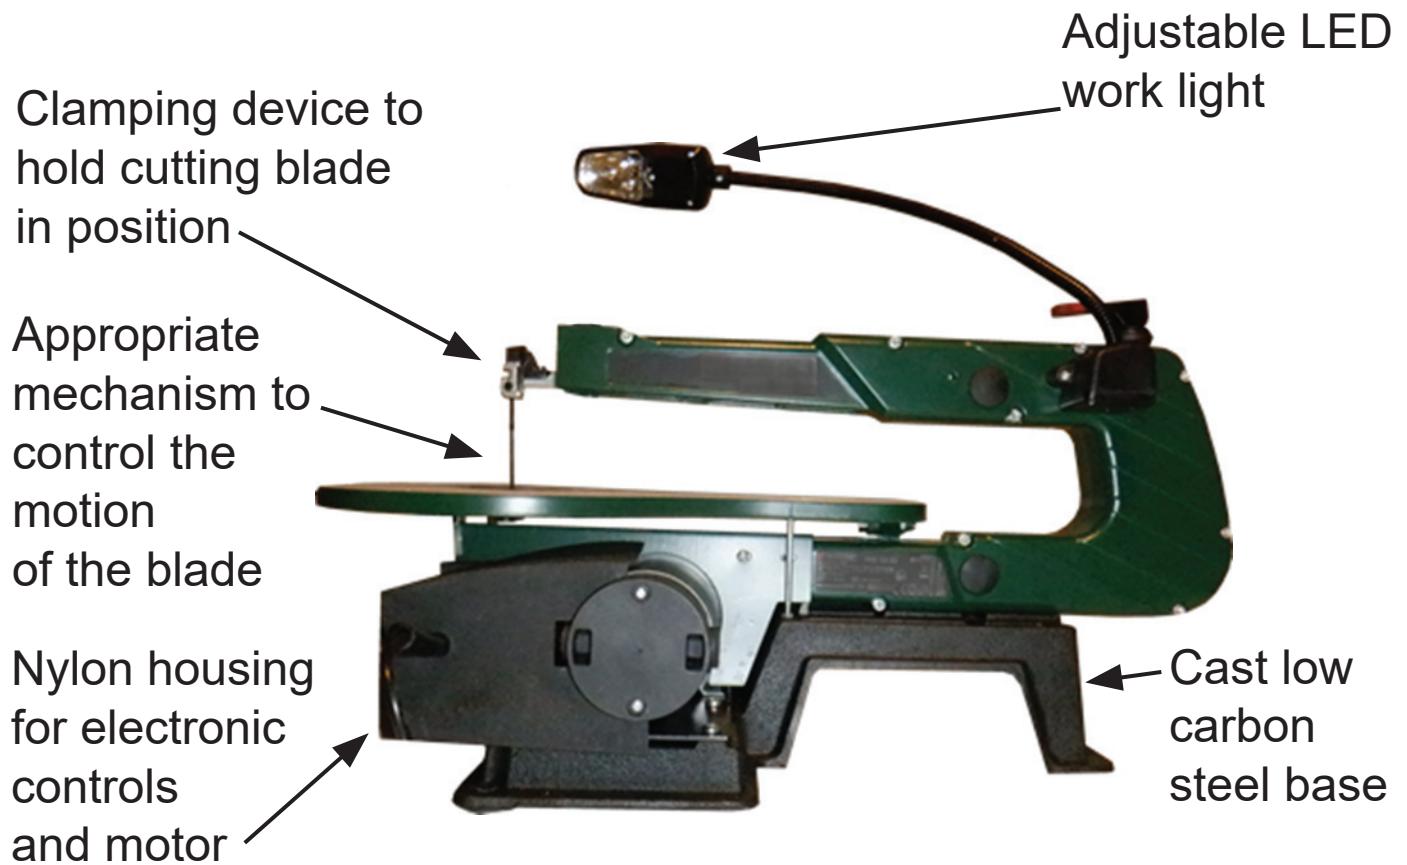


Fig. 2

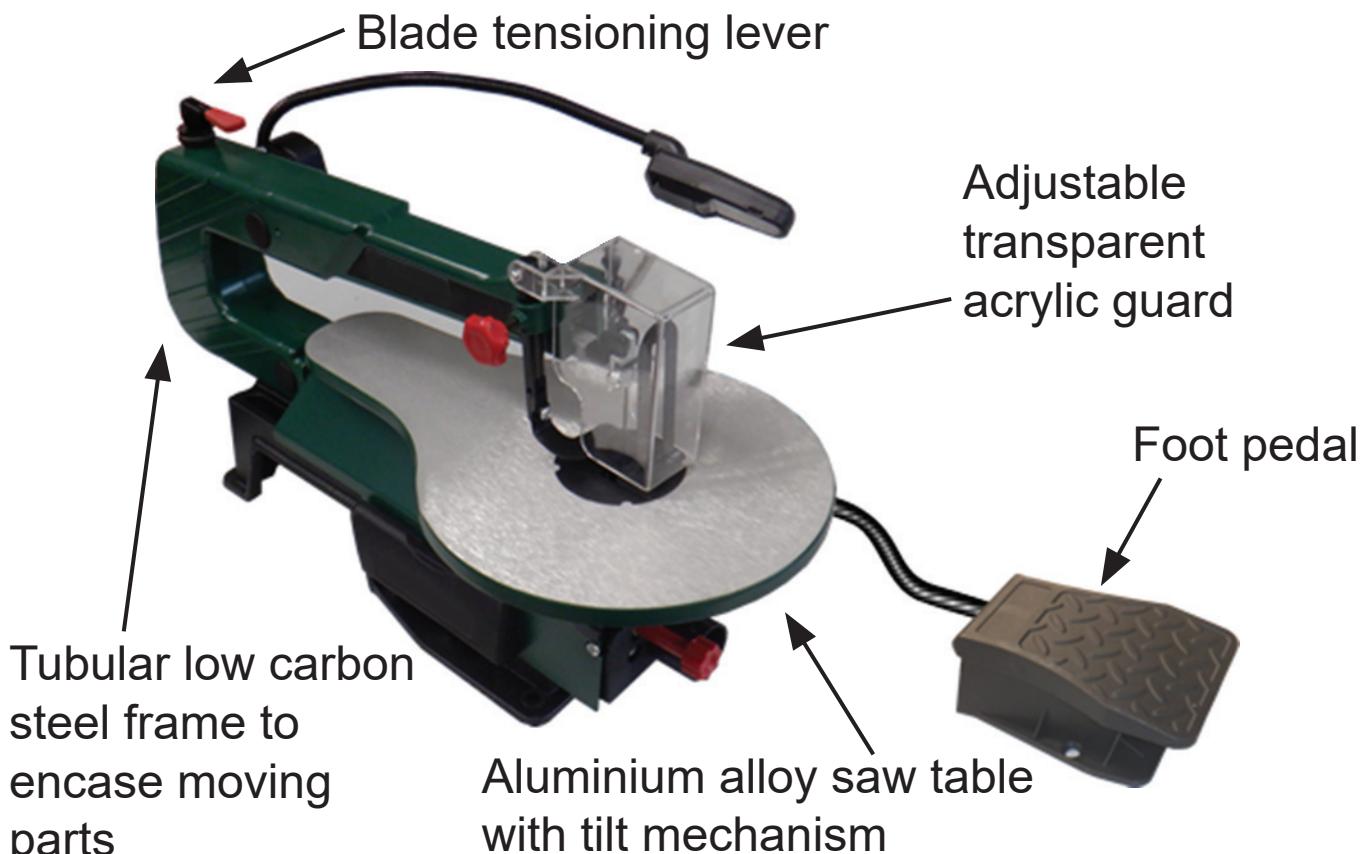

Product features include:

- Reciprocating mechanism;
- Die cast aluminium alloy saw table with tilt mechanism;
- Simple method to fit and remove cutting blades;
- Variable speed electric motor;
- Foot pedal and manual speed control;
- Robust construction with a low carbon steel base and frame;
- Dimensions Height (400 mm) – Length (650 mm) – Width (300 mm); and
- Adjustable transparent acrylic guard for the blade.

Pre-release investigation:

You should investigate the possible impact and use of the following where appropriate, in the design and production of the electric scroll saw:

- Materials and components: including application, properties, processes, form, supply and types of finish;
- Manufacturing processes: including CAD, CAM, robotics, casting and the use of jigs and fixtures;
- Quality control and quality assurance;
- Product safety; and
- Costing: including direct and indirect costs incurred in the manufacture of the electric scroll saw.

SOURCES

All images . . . *Chief Examiner*

Permission to reproduce all copyright material has been applied for.
In some cases, efforts to contact copyright holders may have been unsuccessful and CCEA
will be happy to rectify any omissions of acknowledgement in future if notified.