



Oxford Cambridge and RSA

## **Level 3 Alternative Academic Qualification Cambridge Advanced Nationals in Engineering**

**H027/H127**

### **Formulae Booklet**

#### Unit F130: Principles of engineering

This booklet contains formulae which learners studying the above unit and taking associated examination papers may need to access.

Other relevant formulae may be provided in some questions within examination papers. However, in most cases suitable formulae will need to be selected and applied by the learner. Clean copies of this booklet will be supplied alongside examination papers to be used for reference during examinations.

Formulae have been organised by topic rather than by unit as some may be suitable for use in more than one context.


#### **Note for teachers**

This booklet does not replace the taught content in the unit specification or contain an exhaustive list of required formulae. You should ensure all unit content is taught before learners take associated examinations.

# 1. Mathematics

## Mensuration

### Circle




Radius =  $r$

Diameter =  $d$

Area of a circle =  $\pi r^2$  or  $= \frac{\pi}{4} d^2$

Circumference of a circle =  $2\pi r$  or  $= \pi d$


### Rectangle

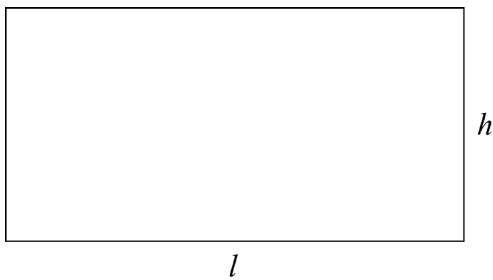

Area =  $lh$

Perimeter =  $2l + 2h$


### Triangle

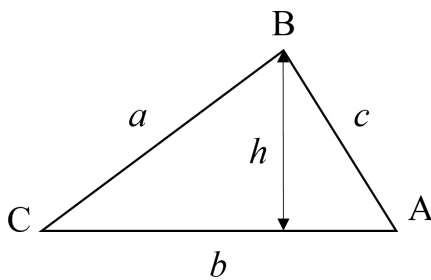

Area =  $\frac{1}{2}bh$  or  $\frac{1}{2}bc \sin A$

Perimeter =  $a + b + c$

### Cylinder




Curved surface area =  $2\pi rh$

Total surface area =  $2\pi r^2 + 2\pi rh$

Volume =  $\pi r^2 h$


## Sphere



$$\text{Surface area} = 4\pi r^2$$

$$\text{Volume} = \frac{4}{3}\pi r^3$$

## Cone



$$\text{Curved surface area} = \pi r l$$

$$\text{Total surface area} = \pi r^2 + \pi r l$$

$$\text{Volume} = \frac{1}{3}\pi r^2 h$$

## Density

$$\text{Density} = \frac{\text{mass}}{\text{volume}}$$

$$\rho = \frac{m}{v}$$

## Algebra – straight-lines

### Straight-line


$y = mx + c$ , where:

$$\text{gradient } m = \frac{\Delta y}{\Delta x}$$

the intercept =  $c$

## Trigonometry

### Trigonometric Ratios

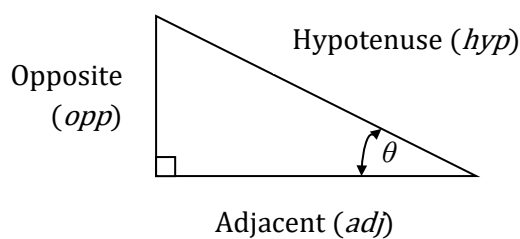

$$\sin \theta = \frac{\text{opp}}{\text{hyp}}$$

$$\cos \theta = \frac{\text{adj}}{\text{hyp}}$$

$$\tan \theta = \frac{\text{opp}}{\text{adj}}$$


Pythagoras' rule:  $\text{hyp}^2 = \text{opp}^2 + \text{adj}^2$

### Converting between radians and degrees

$$\text{radians} = \text{degrees} \times \frac{\pi}{180}$$

$$\text{degrees} = \text{radians} \times \frac{180}{\pi}$$

### Sine and Cosine rules

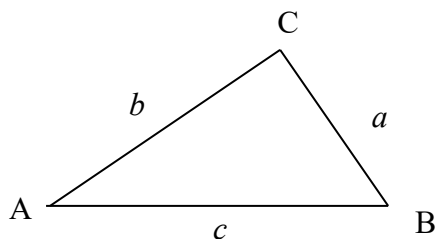

Sine rule:  $\frac{\sin A}{a} = \frac{\sin B}{b} = \frac{\sin C}{c}$

Cosine rule:  $a^2 = b^2 + c^2 - 2bc \cos A$

$$b^2 = a^2 + c^2 - 2ac \cos B$$

$$c^2 = b^2 + a^2 - 2ab \cos C$$

## 2. Mechanical equations

### Systems of forces

Moment = force  $\times$  distance

$$M = Fd$$

Vertical component of force

$$F_v = F \sin \theta, \theta \text{ from the horizontal}$$

Horizontal component of force

$$F_h = F \cos \theta, \theta \text{ from the horizontal}$$

Resultant force

$$F_R = \sqrt{\sum F_v^2 + \sum F_h^2}$$

Direct tensile or compressive stress

$$\sigma = \frac{F}{A}$$

Direct tensile or compressive strain

$$\varepsilon = \frac{\Delta L}{L}$$

Modulus of elasticity or Young's modulus

$$E = \frac{\sigma}{\varepsilon}$$

Shear stress

$$\tau = \frac{F}{A}$$

Shear strain

$$\gamma = \frac{\Delta L}{L}$$

Modulus of rigidity

$$G = \frac{\tau}{\gamma}$$

### Linear dynamic systems

Force = mass  $\times$  acceleration

$$F = ma$$

Weight = mass  $\times$  acceleration due to gravity

$$W = mg$$

Work done = force  $\times$  distance

$$W = Fd$$

Gravitational potential energy = mass  $\times$  gravitational acceleration  $\times$  height

$$E_p = mgh$$

Kinetic energy =  $\frac{1}{2}$  mass  $\times$  velocity<sup>2</sup>

$$E_k = \frac{1}{2}mv^2$$

Average power =  $\frac{\text{work done}}{\text{time}}$

$$P = \frac{W}{t}$$

Instantaneous power = force  $\times$  velocity

$$P = Fv$$

Efficiency

$$\eta = \frac{E_{out}}{E_{in}} \times 100\%$$

Static friction

$$F \leq \mu N$$

Momentum = mass  $\times$  velocity

$$p = mv$$

SUVAT equations:

(s – distance, u – initial velocity, v – final velocity, a – acceleration and t – time.)

- $v = u + at$
- $v^2 = u^2 + 2as$
- $s = ut + \frac{1}{2}at^2$
- $s = \frac{1}{2}(u + v)t$

Conservation of momentum:

- Collisions between two bodies  $m_1u_1 + m_2u_2 = m_1v_1 + m_2v_2$
- Perfectly inelastic collisions between two bodies  $m_1u = (m_1 + m_2)v$

### 3. Electrical/electronic equations

#### Electrical principles

Charge = current  $\times$  time

$$Q = It$$

Electrical energy = charge  $\times$  voltage (potential difference)

$$E = QV$$

Electrical energy = power  $\times$  time

$$E = Pt$$

Resistivity =  $\frac{\text{resistance} \times \text{cross sectional area}}{\text{length of the conductor}}$

$$\rho = \frac{RA}{l}$$

Ohm's Law for DC circuits, resistance =  $\frac{\text{voltage}}{\text{current}}$

$$R = \frac{V}{I}$$

Ohm's law for purely resistive AC circuits, impedance =  $\frac{\text{voltage}}{\text{current}}$

$$Z = \frac{V}{I}$$

Total resistance of series resistors

$$R_T = R_1 + R_2 + R_3 \dots$$

Total resistance of parallel resistors

$$\frac{1}{R_T} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} \dots$$

Electrical power = voltage  $\times$  current

$$P = VI$$

$$= \text{current}^2 \times \text{resistance}$$

$$P = I^2R$$

$$= \frac{\text{Voltage}^2}{\text{resistance}}$$

$$P = \frac{V^2}{R}$$

Kirchhoff's current law (KCL) – for a junction

$$\sum I_{in} = \sum I_{out}$$

Kirchhoff's voltage law (KVL) – for a loop

$$\sum V = 0$$

Permittivity = permittivity of free space  $\times$  relative permittivity

$$\epsilon = \epsilon_0 \times \epsilon_r$$

Capacitance = permittivity  $\times \frac{\text{Cross sectional area}}{\text{distance between plates}}$

$$C = \epsilon \frac{A}{d}$$

Capacitance =  $\frac{\text{Quantity of charge}}{\text{Voltage}}$

$$C = \frac{Q}{V}$$

Energy stored in a capacitor =  $\frac{1}{2} \times \text{capacitance} \times \text{Voltage}^2$

$$E = \frac{1}{2} CV^2$$

Time constant of a capacitor = resistance  $\times$  capacitance

$$\tau = RC$$

Inductance of a coil =  $\frac{\text{Magnetic Flux} \times \text{Number of Turns}}{\text{current}}$

$$L = \frac{\Phi N}{I}$$

Energy stored in an inductor =  $\frac{1}{2} \times \text{inductance} \times \text{current}^2$

$$E = \frac{1}{2} LI^2$$

Force on conductor = flux density  $\times$  current  $\times$  length  $\times$  sine angle

$$F = BIl \sin \theta$$

AC voltage waveform = max. Voltage  $\times$  sine(angular velocity  $\times$  time)

$$v = V_{max} \sin(\omega t)$$

Angular velocity of a waveform =  $2 \times \pi \times \text{frequency}$

$$\omega = 2\pi f$$

Frequency =  $\frac{1}{\text{Time Period}}$

$$f = \frac{1}{T}$$

$$\text{Root-Mean-Square (RMS) Voltage} = \frac{\text{Peak Voltage}}{\sqrt{2}}$$

$$V_{RMS} = \frac{V_{PK}}{\sqrt{2}}$$

Energy efficiency

$$\eta = \frac{\text{energy output}}{\text{energy input}} \times 100\%$$

## Analogue Circuits

$$\text{Voltage amplifier gain/loss} = \frac{\text{Voltage}_{\text{out}}}{\text{Voltage}_{\text{in}}}$$

$$A_v = \frac{V_{out}}{V_{in}}$$

$$\text{Current amplifier gain/loss} = \frac{\text{Current}_{\text{out}}}{\text{Current}_{\text{in}}}$$

$$A_I = \frac{I_{out}}{I_{in}}$$

$$\text{Power amplifier gain/loss} = \text{Voltage gain/loss} \times \text{Current gain/loss} \quad A_P = A_v \times A_I$$

Voltage gain/loss in Decibels

$$a_v(dB) = 20 \times \text{Log}A_v$$

Current gain/loss in Decibels

$$a_I(dB) = 20 \times \text{Log}A_I$$

Power gain/loss in Decibels

$$a_p(dB) = 10 \times \text{Log}A_P$$

Gain of an op-amp: Non-inverting

$$\text{Gain } (A_v) = 1 + \frac{R_1}{R_2}$$

Inverting

$$\text{Gain } (A_v) = -\frac{R_1}{R_2}$$



#### 4. Mathematical, Mechanical and Electrical/Electronic constants

- Acceleration due to gravity  $g = 9.81 \text{ ms}^{-2}$
- Permittivity of free space  $\epsilon_0 = 8.85 \times 10^{-12} \text{ Fm}^{-1}$
- Relative permittivity  $\epsilon_r$ :
  - Relative permittivity of a vacuum  $\epsilon_{vacuum} = 1$
  - Relative permittivity of air  $\epsilon_{air} = 1.0006$
  - Relative permittivity of a ceramic  $\epsilon_{Ceramic} = 2$



Oxford Cambridge and RSA

**Copyright Information**

OCR is committed to seeking permission to reproduce all third-party content that it uses in its assessment materials. OCR has attempted to identify and contact all copyright holders whose work is used in this paper. To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced in the OCR Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download from our public website ([www.ocr.org.uk](http://www.ocr.org.uk)) after the live examination series.

If OCR has unwittingly failed to correctly acknowledge or clear any third-party content in this assessment material, OCR will be happy to correct its mistake at the earliest possible opportunity.

For queries or further information please contact the Copyright Team, OCR (Oxford Cambridge and RSA Examinations), The Triangle Building, Shaftesbury Road, Cambridge CB2 8EA.

OCR is part of Cambridge University Press & Assessment, which is itself a department of the University of Cambridge.