

◆

CODE : NSB

- 8) प्रश्नपुस्तिकेमध्ये विहित केलेल्या विशिष्ट जागीच कच्चे काम (रफ वर्क) करावे. प्रश्नपुस्तिकेव्यतिरिक्त-उत्तरपत्रिकेवर वा कागदावर कच्चे काम केल्यास ते कॉपी करण्याच्या उद्देशाने केले आहे, असे मानले जाईल व त्यानुसार उमेदवारावर शासनाने जारी केलेल्या “परीक्षांमध्ये होणाऱ्या गैरप्रकारांना प्रतिबंध करण्याबाबतचे अधिनियम-82” यातील तरतुदीनुसार कारवाई करण्यात येईल व दोषी व्यक्ती कमाल एका वर्षाच्या कारावासाच्या आणि/किंवा रुपये एक हजार रकमेच्या दंडाच्या शिक्षेस पात्र होईल.
- 9) सदर प्रश्नपत्रिकेसाठी आयोगाने विहित केलेली वेळ संपल्यानंतर उमेदवाराला ही प्रश्नपुस्तिका स्वतःबरोबर परीक्षाकक्षाबाहेर घेऊन जाण्यास परवानगी आहे. मात्र परीक्षाकक्षाबाहेर जाण्यापूर्वी उमेदवाराने आपली उत्तरपत्रिका समवेक्षकाकडे न विसरता परत करणे आवश्यक आहे.
- 10) प्रस्तुत प्रश्नपुस्तिकेतील प्रश्नांमध्ये काही दोष आढळल्यास, त्यासंबंधी उमेदवाराने अधिप्रमाणित (Authentic) स्पष्टीकरण/संदर्भ देऊन आपले लेखी निवेदन आयोगाच्या परीक्षा नियंत्रकांकडेच स्वतःच्या तपशीलासह टपालाने पाठवावे. याबाबत पर्यवेक्षक/समवेक्षक इत्यादींकडे विचारणा करू नये. आयोगाकडे सदर परीक्षेच्या दिनांकापासून 8 दिवसांपर्यंत पोहोचलेल्या लेखी निवेदनाची फक्त दखल घेतली जाते. तदनंतर आलेली निवेदने विचारात घेतली जात नाहीत. तसेच प्राप्त झालेल्या निवेदनाबद्दल कोणताही पत्रव्यवहार केला जात नाही.

नमुना प्रश्न

प्र.क्र.201 : Petrol Engine works on _____ cycle.

- | | |
|-------------|------------|
| (1) Natural | (2) Air |
| (3) Otto | (4) Carnot |

ह्या प्रश्नाचे योग्य उत्तर “(3) Otto’ असे आहे. त्यामुळे या प्रश्नाचे उत्तर “(3)” होईल. यास्तव खालीलप्रमाणे प्र. क्र. 201 समोरील उत्तर क्रमांक “[3]” हा कंस पूर्णपणे छायांकित करून दाखविणे आवश्यक आहे.

प्र. 201. [1] [2] [3] [4]

अशा पद्धतीने प्रस्तुत प्रश्नपुस्तिकेतील प्रत्येक प्रश्नाचा तुमचा उत्तरक्रमांक हा तुम्हाला स्वतंत्ररीत्या पुरविलेल्या उत्तरपत्रिकेवरील त्या त्या प्रश्नक्रमांकासमोरील संबंधित कंस पूर्णपणे छायांकित करून दाखवावा. **ह्याकरिता फक्त निळ्या वा काळ्या शाईचे बॉलपेन वापरावे. पेन्सिल वा शोईचें पेंन वापरू नये.**

पर्यवेक्षकांच्या सूचनेविना हे पृष्ठ उलटू नये

कच्च्या कामासाठी जागा
SPACE FOR ROUGH WORK

AUTOMOBILE ENGINEERING

1. What is the sequence of processes in Otto Cycle ?
 - (1) Adiabatic compression – constant volume heat addition – Adiabatic expansion – constant volume heat rejection
 - (2) Adiabatic compression – constant pressure heat addition – Adiabatic expansion – constant volume heat rejection.
 - (3) Adiabatic compression – constant volume heat addition – Adiabatic expansion – constant pressure heat rejection
 - (4) Adiabatic compression – constant volume and constant pressure heat addition – Adiabatic expansion – constant volume heat rejection.

2. Two types of engines used in automobiles are
 - (1) Steam engines and C.I. engines
 - (2) Steam turbines and S.I. engines
 - (3) C.I. engines and S.I. engines
 - (4) Gas turbines and steam turbines

3. The correct order in which the four operations occur in four stroke engine is
 - (1) suction, compression, power, exhaust
 - (2) suction, power, compression, exhaust
 - (3) compression, power, suction, exhaust
 - (4) exhaust, compression, suction, power

4. Stroke means piston movement from
 - (1) BDC to TDC
 - (2) TDC to BDC
 - (3) Both (1) and (2)
 - (4) Neither (1) nor (2)

5. The fuel in the float chamber is kept at a constant level by the action of
 - (1) Float and needle valve
 - (2) Main jet
 - (3) Fuel pump
 - (4) Opening of throttle valve

6. Stalling of S.I. Engine after high speed driving can be caused by
 - (1) Vapour lock
 - (2) Incorrect ignition timing
 - (3) Malfunctioning of carburettor
 - (4) Malfunctioning of spark plug


7. A : knock occurs in II phase of combustion in diesel engine
R : Because of longer delay period
 - (1) A – true, R – not true
 - (2) A – not true, R – true
 - (3) Both are not true
 - (4) A – true and R is the reason of A

- ◆
8. When air-fuel mixture ignites before the spark, the phenomenon is called as
- | | |
|------------------|---------------------|
| (1) Detonation | (2) Normal Ignition |
| (3) Pre-ignition | (4) Auto-ignition |
-
9. The stoichiometric A/F ratio for combustion in S.I. engine is
- | | |
|------------|------------|
| (1) 4 : 1 | (2) 12 : 1 |
| (3) 15 : 1 | (4) 7 : 1 |
-
10. How many stages are there in C.I. Engine combustion ?
- | | |
|-----------|----------|
| (1) Four | (2) Five |
| (3) Three | (4) Two |
-
11. Antiknock quality of gasoline is measured in
- | |
|-------------------------|
| (1) Oxidation number |
| (2) Vaporization number |
| (3) Octane number |
| (4) Cetane number |
-
12. Which part of engine is having connection with pinion of starting motor ?
- | | |
|-------------------|---------------|
| (1) Crankshaft | (2) Cam shaft |
| (3) Damper pulley | (4) Fly wheel |
-
13. Why wet battery is required to supply current to starter motor ?
- | |
|---|
| (1) To have high voltage |
| (2) To have low voltage and very high current |
| (3) To have smooth operation |
| (4) To reduce cost |
-
14. The automotive electrical system does all the following **EXCEPT**
- | |
|--|
| (1) produces electric energy |
| (2) stores electrical energy in alternator |
| (3) stores electrical energy in chemical form |
| (4) delivers electrical energy on demand to other electrical accessories |
-
15. The voltage required at spark plug is
- | |
|---------------------------|
| (1) 6 – 12 V |
| (2) 1000 – 2000 V |
| (3) 10,000 – 20,000 V |
| (4) 1,00,000 – 2,00,000 V |
-

NSB

16. Why flash point and fire point of fuel is determined ?
- (1) For knowing how safe it is when stored
 - (2) For knowing combustion characteristic of fuel
 - (3) For knowing self-ignition temperature of fuel
 - (4) For knowing vapour lock tendency of fuel

(For Q. No. 17 – 19) Refer the diagram given below and answer the three questions :

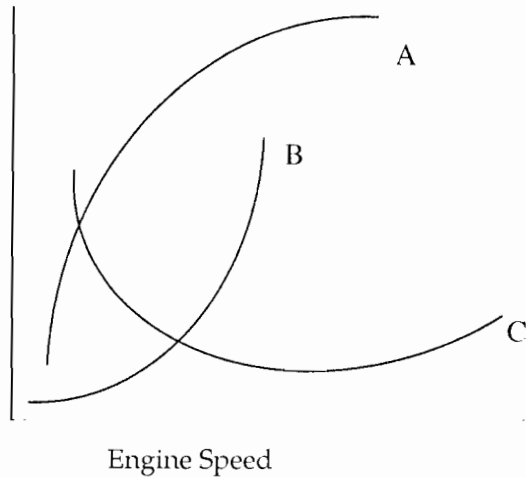

17. The curve A in the given diagram represents
- (1) engine fuel consumption
 - (2) engine brake specific fuel consumption
 - (3) engine brake torque
 - (4) engine brake power
18. The curve B in the given diagram represents
- (1) engine fuel consumption
 - (2) engine brake specific fuel consumption
 - (3) engine brake torque
 - (4) engine brake power
19. The curve C in the given diagram represents
- (1) engine fuel consumption
 - (2) engine brake specific fuel consumption
 - (3) engine brake torque
 - (4) engine brake power
20. Idling co-emission for all two and three wheeled petrol vehicles should not exceed by volume
- | | |
|-----------|-----------|
| (1) 3.0 % | (2) 4.5 % |
| (3) 5.0 % | (4) 6.0 % |

- ◆
21. Maximum torque multiplication in a torque converter is
- | | |
|---------|---------|
| (1) 2.8 | (2) 8.2 |
| (3) 1.5 | (4) 5.1 |
-
22. Clutch slips due to
- | |
|----------------------------|
| (a) Oil on friction plate |
| (b) Worn-out clutch lining |
| (c) Weak pressure springs |
- (1) (a) alone is correct
(2) (a) and (b) are correct
(3) (a) and (c) are correct
(4) All (a), (b) and (c) are correct
-
23. The purpose of the sliding joint in a propeller shaft is to
- | |
|---|
| (1) adjust the distance between gear box and differential |
| (2) avoid whirling motion of propeller shaft |
| (3) transfer power from gear box and differential |
| (4) allow easy disassembly of the propeller shaft for repairs |
-
24. Rear axle of HCVs is equipped with the following arrangement :
- | | |
|--------------------|----------------------------|
| (1) semi-floating | (2) three quarter-floating |
| (3) fully-floating | (4) a quarter-floating |
-
25. Limited slip differential is essential in
- | | |
|----------|--------------|
| (1) Cars | (2) Trucks |
| (3) MUV | (4) Tractors |
-
26. The camber angle is normally kept upto
- | | |
|----------------|----------------|
| (1) 06° | (2) 04° |
| (3) 05° | (4) 02° |
-
27. The following are the reasons for hard steering
- | |
|---|
| (a) excessive castor may be there |
| (b) incorrect wheel alignment |
| (c) tyre pressure may be too high |
| (d) steering-gear may be adjusted too tightly |
- (1) All are correct
(2) (a), (b) & (d) are correct
(3) (b), (c) & (d) are correct
(4) (a), (b) & (c) are correct
-

NSB

28. In a simple planetary gear set, the output member used in order to increase always
- (1) Sun gear (2) Ring gear
(3) Planet carrier (4) Planet
-
29. The brake system which is the most efficient among the given, is
- (1) Mechanical brake system
(2) Hydraulic brake system
(3) Vacuum servo brake system
(4) Air brake system
-
30. Select the better arrangement of shoes for manually operated hydraulic brake system
- (1) one leading, one trailing shoe
(2) both leading shoes
(3) both trailing shoes
(4) Any of the arrangement
-
31. The purpose of tyre rotation on automobiles is to
- (1) avoid ply separation
(2) get better ride
(3) equalise wear
(4) decrease heat dissipation in tyre
-
32. Which of the following pair(s) is/are correctly matched ?
- (a) Spark plug - 1 mm
(b) C.B. point - 0.3 mm
(c) condenser - 12 V - 0.2 μ F
(d) L. T. - 12 V
- (1) (a), (b) & (c) (2) (a), (b) & (d)
(3) (a) & (b) (4) (a) & (d)
-
33. Which of the following pair(s) is NOT properly matched ?
- (1) Head light - 12 V, 60W/60W
(2) Blinkers - 12 V, 18W /18W
(3) Brake light - 12 V, 3W
(4) Parking light - 12 V, 6W
-
34. The distance between the front axle and the rear axle measured along the length of the vehicle is called
- (1) Wheel track (2) Wheel base
(3) Front overhang (4) Vehicle length
-

- ◆
35. Which resistance depends upon wind velocity, speed, shape and size of the body of the vehicle ?
- | | |
|---------------------------|-------------------------|
| (1) Frictional resistance | (2) Rolling resistance |
| (3) Air resistance | (4) Tractive resistance |
-
36. While cornering, centrifugal force produces a movement of vehicle about a longitudinal axis, which is called as
- | | |
|--------------|-----------------------|
| (1) Bouncing | (2) Pitching |
| (3) Rolling | (4) Gyroscopic effect |
-
37. Maruti 1000 passenger car is having following layout :
- | |
|------------------------------------|
| (1) Front Engine Rear Wheel Drive |
| (2) Rear Engine Rear Wheel Drive |
| (3) Front Engine Front Wheel Drive |
| (4) Rear Engine Front Wheel Drive |
-
38. Which of the following car body shapes has the largest internal dimensions ?
- | | |
|-----------------|------------|
| (1) Coupe | (2) Saloon |
| (3) Convertible | (4) Estate |
-
39. In conventional layout, clutch is mounted between
- | |
|-------------------------------------|
| (1) Engine and Gear box |
| (2) Gear box and propeller shaft |
| (3) Propeller shaft and final drive |
| (4) Final drive and differential |
-
40. Worn-out piston rings cause
- | | |
|--------------------------------|-------------------------------------|
| (a) excessive oil consumption | (b) loss of power |
| (c) loss of torque | (d) loss of compression |
| (1) only (a) & (b) are correct | (2) only (a), (c) & (d) are correct |
| (3) All are correct | (4) only (a) is correct |
-
41. Which piston ring wears faster than the other ring ?
- | | |
|--------------------------|----------------------------|
| (1) Top compression ring | (2) Lower compression ring |
| (3) Oil control ring | (4) Oil scraper ring |
-
42. Pitch and tone of electric horn is adjusted by
- | |
|--|
| (1) air gap |
| (2) contact gap |
| (3) air gap and contact gap respectively |
| (4) contact gap and air gap respectively |
-
43. Vapour lock occurs in the
- | | |
|--------------------------|------------------------|
| (1) Fuel line or pump | (2) Fuel pump or tank |
| (3) Carburettor and tank | (4) Tank or gauge pipe |
-

NSB

44. To remove cylinder liners from engine block, use
- (1) Wooden hammer and chisel
 - (2) Pullers
 - (3) Pressure screw, pusher and twister
 - (4) Mallet and vice grip
-
45. A bent wheel of the car should be
- (1) welded
 - (2) heated
 - (3) straightened
 - (4) discarded
-
46. The process of removing all of the old brake fluid from the hydraulic system is called
- (1) bleeding
 - (2) cleaning
 - (3) changing
 - (4) flushing
-
47. A warped pressure plate should be :
- (1) retempered
 - (2) straightened
 - (3) replaced
 - (4) refaced
-
48. Painting cracks occur due to
- (1) thin layer of paint
 - (2) thick layer of paint
 - (3) improper paint viscosity
 - (4) wrong setting of air pressure during painting
-
49. Front wheel alignment is adjusted by altering
- (1) angle of track arm
 - (2) length of track arm
 - (3) distance between king pins
 - (4) position of the drag link
-
50. Firing order of six cylinder inline engine fitted with right hand crankshaft is
- (1) 1 - 5 - 3 - 6 - 2 - 4
 - (2) 1 - 6 - 2 - 5 - 3 - 4
 - (3) 1 - 6 - 5 - 4 - 3 - 2
 - (4) 1 - 4 - 2 - 5 - 3 - 6
-
51. A motor vehicle designed for physically handicapped person is called
- (1) contract carriage
 - (2) stage carriage
 - (3) invalid carriage
 - (4) articulate carriage
-
52. LCV have gross vehicle weight range as
- (1) 1.5 - 6.0 tonnes
 - (2) 5.0 - 8.5 tonnes
 - (3) 8.0 - 10.0 tonnes
 - (4) 10.0 - 16.0 tonnes
-

- ◆
53. Secretary of Regional Transport Authority is
- | | |
|----------------------------|------------------------|
| (1) R.T.O. | (2) Transport Minister |
| (3) Transport Commissioner | (4) I.M.V. |
-
54. CMVR revised in the year _____ is being enforced today.
- | | |
|----------|----------|
| (1) 1988 | (2) 1956 |
| (3) 1979 | (4) 1989 |
-
55. CRRI is situated at
- | | |
|----------------|------------|
| (1) Pune | (2) Mumbai |
| (3) Ahmednagar | (4) Delhi |
-
56. Who is the administrative in-charge at State Transport Depot ?
- | |
|---------------------------|
| (1) Depot Controller |
| (2) Asst. Traffic Supdt. |
| (3) Depot Manager |
| (4) Asst. Workshop Supdt. |
-
57. The proto-type of every vehicle to be mechanically fit to drive in public place is certified by :
- | | |
|----------|----------|
| (1) CIRT | (2) ARAI |
| (3) VRDI | (4) CRRI |
-
58. Third party insurance safeguards the interest of
- | |
|------------------------------------|
| (1) third party only |
| (2) owner only |
| (3) owner and third party |
| (4) owner, third party and vehicle |
-
59. Temporary registration of a motor cycle remains valid for a period not exceeding
- | | |
|----------------|---------------|
| (1) 15 days | (2) one month |
| (3) six months | (4) one year |
-
60. Minimum educational qualifications for driving goods carriage carrying dangerous goods is
- | | |
|-----------------|----------------|
| (1) Fourth Std. | (2) Fifth Std. |
| (3) Ninth Std. | (4) Tenth Std. |
-
61. If material expands freely due to heating, it will develop
- | | |
|--------------------------|----------------------|
| (1) Thermal stresses | (2) Tensile stresses |
| (3) Compressive stresses | (4) No stress. |

NSB

62. The total strain energy stored in a body is termed as
- (1) Resilience (2) Proof resilience
(3) Modulus of resilience (4) Toughness
-
63. According to Euler's theory, the strength of a column against buckling is dependent upon
- (1) Modulus of elasticity (2) Bulk modulus
(3) Cross-section area of column (4) None of above
-
64. In a beam at a place where the shear force is maximum, the bending moment will be
- (1) Maximum (2) Minimum
(3) Zero (4) Neither maximum nor minimum
-
65. A beam is said to be of uniform strength if
- (1) Bending moment is same throughout the beam
(2) Shear stress is same throughout the beam
(3) Deflection is same throughout the beam
(4) Bending stress is same at every section along its longitudinal axis.
-
66. Maximum shear stress in Mohr's circle is
- (1) Equal to radius of Mohr's circle
(2) Greater than radius of Mohr's circle
(3) Less than radius of Mohr's circle
(4) None of above
-
67. The constant term 'a' for Rankine's formula is called Rankine's constant and is given by :
- where f_c = Yield stress in component, E = Modulus of elasticity
- (1) $a = \frac{f_c}{\pi^2 E}$ (2) $a = \frac{f_c}{\pi E}$
(3) $a = \frac{f_c^2}{\pi E}$ (4) $a = \frac{f_c \pi^2}{E}$
-
68. What is the angle between plane of maximum shear with principal plane ?
- (1) 90° (2) 45°
(3) 60° (4) 0°
-
69. If a shaft is designed to take combined bending moment (M) and torsion (T), then the equivalent torque will be
- (1) $\sqrt{M^2 + T^2}$ (2) $\frac{1}{2} [M + \sqrt{M^2 + T^2}]$
(3) $\frac{1}{2} \sqrt{M^2 + T^2}$ (4) $M + \sqrt{M^2 + T^2}$

◆

70. Hoop stress ' σ ' in a thin cylinder is given by the formula,
where D = Diameter of cylinder

P = Load applied

t = Thickness

$$(1) \quad \sigma = \frac{PD}{2t} \qquad (2) \quad \sigma = \frac{PD}{4t}$$

$$(3) \quad \sigma = \frac{PD}{t} \qquad (4) \quad \sigma = \frac{PD}{8t}$$

71. Working of metals at temperature below their recrystallisation temperature is defined as

- (1) Hot working (2) Cold working
(3) Hot spinning (4) Cold spinning

72. Hollow cylindrical bodies like water pipes, gun barrels etc., can be manufactured by

- (1) Investment casting (2) Die casting
(3) Centrifugal casting (4) Shell moulding

73. Split nut in lead screw mechanism of lathe has threads.

- (1) Vee (2) Square
(3) Buttress (4) Acme

74. Work holding device used for hollow cylindrical bar on lathe is

- (1) Chuck (2) Arbour
(3) Mandrel (4) Magnetic chuck

75. The main difference between a shaper and a planer is

- (1) A shaper is smaller in size
(2) A shaper is hydraulically operated while a planer is mechanically operated
(3) Number of cutting tools is more in planer
(4) Cutting tool is stationary in planer while cutting tool moves in shaper.

76. Thermoplastic material such as cellulose nitrate, polystyrene are cast by

- (1) Continuous casting (2) Centrifugal casting
(3) Injection moulding (4) Die casting

77. Milling of curved irregular surfaces is possible with

- (1) shaper
(2) vertical column and knee milling machine
(3) plane milling
(4) None of the above

NSB

78. Shock resisting steel is mainly used for _____
- (1) Leaf and coil spring (2) Hammers and chisels
(3) Cranks and piston rods (4) Loco wheels and rails
-
79. What are the changes of metal structure dimension in hot rolling process as the metal passes through the rolls ?
- (1) Reduced in thickness and increased in length
(2) Reduced in thickness and in length
(3) Increased in thickness and reduced in length
(4) Increased in thickness and in length
-
80. Which process is used to produce tools, gear blanks, crankshafts, connecting rods, gears etc. ?
- (1) Forging (2) Smithing
(3) Swaging (4) Fullering
-
81. Which is the process of removing thick layers of metal by means of Cold Chisel ?
- (1) Cutting (2) Sawing
(3) Chipping (4) None of the above
-
82. Drill size before tapping is derived from the formula _____, where 'D' is diameter of tap drill size, 'T' is diameter of tap to be used and 'd' is depth of cut
- (1) $D = T + 2d$ (2) $D = T - 2d$
(3) $D = T + 3d$ (4) $D = T - 3d$
-
83. What are conditions which tend to promote the formation of built-up edge of cutting tool ?
- (1) Low cutting speed, low rake angle and high speed.
(2) High cutting speed, low rake angle and high speed.
(3) High cutting speed, high rake angle and high feed.
(4) Low cutting speed, high rake angle and low feed.
-
84. Which cutting tool is used for enlarging or finishing a hole previously drilled, bored or cored to give a good finish and an accurate dimension ?
- (1) Parallel shank twist drill
(2) Taper shank core drill
(3) Reamer
(4) Multi-tooth twist cutter
-
85. Precision grinders are those that finish parts to a very accurate dimensions. One of the grinders is _____
- (1) Swing frame grinder (2) Abrasive belt grinder
(3) Surface grinder (4) Portable and flexible shaft grinder
-

- ◆
86. Which is a process that is used to produce geometrically true surface, correct surface imperfections, improve dimensional accuracy or provide a very close fit between two contact surfaces ?
- (1) Honing (2) Polishing
(3) Lapping (4) Buffing
-
87. The purpose of annealing is to
- (1) refine structure (2) reduce softness
(3) improve machinability (4) None of the above
-
88. Choose the wrong statement from the following :
- (1) The shaper in comparison to planer is easier to operate and about three times quicker in action.
(2) In shaper, the metal is removed during forward stroke.
(3) The shaper is best suited for cutting keyways and splines on shafts.
(4) In case of planer, reciprocating motion is given to the cutting tool.
-
89. The orthogonal cutting takes place when cutting face of tool is at one of the angles mentioned below to the line of action of tool.
- (1) 45° (2) 60°
(3) 90° (4) 120°
-
90. Which one of the following is most suitable to hold the job for drilling hole on the curved surface ?
- (1) Angle plate (2) Table with T-slot
(3) Vee-block (4) None of these
-
91. A body of weight 1000 N is moved on a horizontal plane having coefficient of friction $\frac{1}{\sqrt{3}}$. The minimum force applied parallel to the horizontal plane to move the body is
- (1) $1000\sqrt{3}$ (2) 1000
(3) $\frac{1000}{\sqrt{3}}$ (4) 500
-
92. The efficiency of screw jack
- (1) depends on load on jack
(2) depends on the pitch of the screw threads of the jack
(3) depends on both (1) and (2)
(4) does not depend combinedly on (1) and (2)
-
93. A dynamometer fitted on internal combustion engine measures
- (1) the brake horse power (2) the brake torque
(3) the indicated horse power (4) the indicated torque
-

NSB

94. The size of the cam depends upon
- | | |
|------------------|------------------|
| (1) Base circle | (2) Prime circle |
| (3) Pitch circle | (4) Pitch curve |
-
95. The magnitude of 'Coriolis' component of acceleration of sliding block relative to link is _____,
where V = velocity of sliding block on link, ω = angular velocity of link
- | | |
|----------------|-------------------------|
| (1) $V\omega$ | (2) $\frac{V\omega}{2}$ |
| (3) $2V\omega$ | (4) $V\omega^2$ |
-
96. In an engine mechanism, at what position of Crank angle, the angular velocity of connecting rod is zero ?
- | | |
|-----------------|----------------|
| (1) 180° | (2) 90° |
| (3) 45° | (4) 0° |
-
97. Contact ratio of spur gear pair is the ratio of
- Angle of action to pitch angle
 - Length of line of action to base of pitch of teeth
 - Length of line of action to circular pitch of teeth
 - Arc of contact to circular pitch of teeth.
- Which of these statements are correct ?
- | | |
|----------------------------------|----------------------------------|
| (1) (a), (b) and (c) are correct | (2) (a), (b) and (d) are correct |
| (3) (b), (c) and (d) are correct | (4) All are correct |
-
98. The angle between the common tangent to the base circle of gear pair and common tangent to their pitch circle is called as _____
- | | |
|------------------|--------------------|
| (1) Cone angle | (2) Helix angle |
| (3) Spiral angle | (4) Pressure angle |
-
99. No force is required for the downward motion of the load on screw jack if _____.
(α = pitch angle and ϕ = Friction angle)
- | | |
|---------------------|-----------------------|
| (1) $\alpha < \phi$ | (2) $\alpha > \phi$ |
| (3) $\alpha = 0$ | (4) None of the above |
-
100. In case of Pivot bearing, the wear is
- Maximum at the centre of the contact area
 - Zero at the centre of the contact area
 - Uniform throughout the contact area
 - Zero at the maximum radius of the contact area
-

◆
101. Specific speed of the hydraulic turbine is given by following equation :

$$(1) N_s = \frac{NP}{\sqrt{H}} \quad (2) N_s = \frac{N\sqrt{P}}{H}$$
$$(3) N_s = \frac{N\sqrt{P}}{H^{3/4}} \quad (4) N_s = \frac{N\sqrt{P}}{H^{5/4}}$$

102. Falling drops of rain acquire spherical shape on account of

- (1) Viscosity (2) Surface Tension
(3) Adhesion and cohesion (4) Compressibility

103. The standard atmospheric pressure of air is

- (a) 760 mm of mercury
(b) 10.33 metres of water column
(c) 1.0332 atm
(d) 101.325 KN/m²
- (1) (a) alone is correct (2) (a) & (b) are correct
(3) (a), (b) & (c) are correct (4) All are correct

104. The centre of gravity of the volume of the liquid dispersed by an immersed body is called as

- (1) Centre of pressure (2) Meta-centre
(3) Centre of buoyancy (4) Centre of gravity

105. Which of the following represents steady uniform flow ?

- (1) Flow through a diverging duct at increasing rate
(2) Flow through a diverging duct at any decreasing rate
(3) Flow through a long pipe at constant rate
(4) Flow through a long pipe at decreasing rate

106. Cavitation in hydraulic turbine results in

- (1) Noise and vibration (2) Reduction of discharge
(3) Drop in output and efficiency (4) All of the above

107. For pumping viscous oil, the pump used is _____

- (1) Centrifugal pump (2) Reciprocating pump
(3) Turbine pump (4) Screw pump

108. A pump which does not come in category of positive displacement pump is

- (1) Reciprocating pump (2) Gear pump
(3) Vane pump (4) Centrifugal pump

109. The water turbine selected for head varying from 50 m to 150 m is

- (1) Bulb Turbine (2) Propeller Turbine
(3) Pelton Wheel (4) Francis Turbine

NSB

110. Airy vessels are provided in reciprocating pump to
- (1) store air discharged by pump
 - (2) obtain continuous discharge from the pump
 - (3) increase the pressure of water
 - (4) safeguard the pump
-
111. Petroleum can be classified as
- (1) A renewable form of energy source
 - (2) A non-renewable form of energy source
 - (3) A non-conventional form of energy source
 - (4) None of the above
-
112. The disadvantage of using solar energy for power production is
- (1) Energy available in daytime only
 - (2) Initial cost is high
 - (3) Requirement of large area for harnessing solar energy
 - (4) All of the above
-
113. Solar cells are made of
- | | |
|------------|--------------|
| (1) Silica | (2) Antimony |
| (3) Carbon | (4) Steel |
-
114. Which of the following devices can be used to harness solar energy ?
- | | |
|------------------------|-------------------|
| (1) Photo-voltaic cell | (2) Wind mill |
| (3) Gas turbine | (4) Steam turbine |
-
115. When can we have windmill for power ?
- (1) When high velocity wind (not cyclonic) for long duration of day is available
 - (2) Cyclonic wind is available
 - (3) Low velocity wind is constantly available
 - (4) Movement of air occurs
-
116. Which one of the following is correct statement ?
- (1) Latent heat is the heat that does not follow first law of thermodynamics.
 - (2) Latent heat is the heat that is required to change the substance from solid to gaseous state
 - (3) Latent heat is the heat that can be detected
 - (4) Latent heat is the heat required to change a state of substance from liquid to gaseous state.
-
117. In steam power plant, thermodynamic cycle used is _____
- | | |
|-------------|-------------|
| (1) Brayton | (2) Rankine |
| (3) Carnot | (4) Joule |
-

- ◆
118. Match List-I correctly with List-II and select your answer using the code given below

List-I				List-II	
(A)	Steam engine			I	Spark plug
(B)	Steam turbine			II	Eccentric
(C)	Otto cycle engine			III	Manhole
(D)	Boiler			IV	Fixed and moving blades
	A	B	C	D	
(1)	II	IV	I	III	
(2)	III	II	I	IV	
(3)	IV	III	II	I	
(4)	I	III	IV	II	

119. The fuel mostly used in steam boilers is

- | | |
|--------------------------------|----------------------------|
| (1) Peat | (2) Coking bituminous coal |
| (3) Non-coking bituminous coal | (4) Brown coal |

120. In a four stroke engine, we get one power stroke in _____

- | | |
|----------------------------|----------------------------|
| (1) 270° of crank rotation | (2) 360° of crank rotation |
| (3) 540° of crank rotation | (4) 720° of crank rotation |

121. Morse test is carried out to determine the IP of a _____

- (1) Single cylinder petrol engine
- (2) Single cylinder diesel engine
- (3) Multi cylinder engine
- (4) Double acting steam engine

122. The device for smoothing out the power impulses from the engine is called _____

- | | |
|----------------------|------------------|
| (1) Fly wheel | (2) Clutch |
| (3) Torque convertor | (4) Differential |

123. Which one of the statement is correct ?

- (i) Petrol engine is a reciprocating engine
 - (ii) Petrol engine is high speed engine
 - (iii) Petrol engine uses petrol as fuel
 - (iv) Petrol engine is internal combustion engine
- | | |
|--------------------------|-------------------------|
| (1) All four are correct | (2) only (i) is correct |
| (3) only (iv) is correct | (4) All are wrong |

124. To develop high voltage for spark plug of petrol engine

- | | |
|------------------------------|--------------------------------|
| (1) Distributor is installed | (2) Carburettor is installed |
| (3) Battery is installed | (4) Ignition coil is installed |

125. Standard firing order for four cylinder, four stroke petrol engine is

- | | |
|-------------------|-------------------|
| (1) 1 - 4 - 3 - 2 | (2) 1 - 3 - 4 - 2 |
| (3) 1 - 3 - 2 - 4 | (4) 1 - 2 - 3 - 4 |

NSB

126. In compression ignition four stroke cycle engine, Cam shaft runs at
- (1) half the speed of crankshaft
 - (2) same the speed of crankshaft
 - (3) twice the speed of crankshaft
 - (4) any speed irrespective of crankshaft speed.
-
127. The actual volume of fresh charge taken into four stroke-petrol engine is
- (1) Less than stroke volume
 - (2) Equal to stroke volume
 - (3) Equal to stroke volume + clearance volume
 - (4) Does not depend upon stroke volume
-
128. A two stroke IC engine is identified by
- | | |
|----------------------------|--------------------------|
| (1) the size of the engine | (2) size of the flywheel |
| (3) type of cooling system | (4) absence of valves |
-
129. Within a carburettor, the velocity of air is maximum at
- | | |
|-----------------------|-----------------------------------|
| (1) outlet | (2) inlet |
| (3) throat of venturi | (4) central point of total length |
-
130. The diesel engine is identified by the presence of
- | | |
|-------------------|--------------|
| (1) air cleaner | (2) radiator |
| (3) fuel injector | (4) starter |
-
131. In a heat engine which of the following energy conservation occurs ?
- (1) Work is converted into heat.
 - (2) Heat energy is converted into electrical energy.
 - (3) Heat energy is converted into work.
 - (4) Electrical energy is converted into heat energy.
-
132. What is thermal efficiency of a heat engine ?
- (1) It is the ratio of brake power to indicated power
 - (2) It is the ratio of work output to heat supplied
 - (3) It is the ratio of heat rejected to heat supplied
 - (4) **It is the ratio of work output to heat rejected**
-
133. Compression ratio of a petrol engine is
- | | |
|---------------------------------------|--------------------------------------|
| (1) Higher than that of diesel engine | (2) Lower than that of diesel engine |
| (3) Equal to that of diesel engine | (4) None of the above |
-
134. In a condensing steam engine,
- (1) the pressure in condenser is above atmospheric pressure
 - (2) the pressure is below atmospheric pressure
 - (3) the pressure is equal to atmospheric pressure
 - (4) the complete vacuum exists in condenser
-

- ◆
135. With increase in compression ratio, the thermal efficiency of the Otto cycle
- (1) Decreases
 - (2) Does not change
 - (3) Cannot be predicted unless ' γ ' (adiabatic index) is known
 - (4) Increases
-
136. As the compression ratio increases, the volumetric efficiency of compressor
- (1) decreases
 - (2) increases
 - (3) remains same
 - (4) becomes unpredictable
-
137. Rotary compressor can supply
- (1) large volumes of air at low pressure
 - (2) small volumes of air at high pressure
 - (3) large volumes of air at high pressure
 - (4) small volumes of air at low pressure
-
138. Which one of the following is not a safety device on Compressor ?
- (1) Relief valve
 - (2) Over-pressure shut down
 - (3) Strainer
 - (4) Over-speed shut down
-
139. The axial flow compressor and centrifugal compressor represent
- (1) Positive and non-positive type of rotary compressor respectively
 - (2) Positive type compressors
 - (3) Non-positive and positive type of rotary compressor respectively
 - (4) Non-positive type of compressors
-
140. In multistage compression, intercooling is done to
- (1) Reduce the volume of air
 - (2) Minimise the work of compression
 - (3) Cool the air
 - (4) All of the above
-
141. Refrigeration is based on
- (1) First law of thermodynamics
 - (2) Second law of thermodynamics
 - (3) Dalton's law
 - (4) Boyle's law
-
142. In domestic refrigerator, following compressor is used :
- (1) Rotary
 - (2) Reciprocating
 - (3) Centrifugal
 - (4) None of the above
-
143. Freezing point of Brine is
- (1) Below 0° centigrade
 - (2) Above 0° centigrade
 - (3) Equal to 0° centigrade
 - (4) None of the above
-

NSB

144. Function of thermostat in a domestic refrigerator is to maintain
- | | |
|--------------------------|-----------------------|
| (1) Temperature constant | (2) Pressure constant |
| (3) Volume constant | (4) None of the above |
-
145. Air conditioning is control of
- | |
|--|
| (1) Temperature of air |
| (2) Relative humidity of air |
| (3) Temperature, relative humidity and motion of air |
| (4) None of the above |
-
146. In comfort air conditioning, the required comfort conditions are
- | |
|------------------------------|
| (1) 15° C DBT and 75% R. H. |
| (2) 20° C DBT and 80 % R. H. |
| (3) 15° C DBT and 35% R. H. |
| (4) 24° C DBT and 60% R. H. |
-
147. Human body dissipates heat in the form of
- | |
|------------------------------------|
| (1) Sensible heat only |
| (2) Latent heat only |
| (3) Both sensitive and latent heat |
| (4) None of the above |
-
148. The method commonly used for dehumidifying air is
- | | |
|-------------------------|-------------------------------|
| (1) Heating | (2) Cooling |
| (3) Heating and Cooling | (4) To spray steam in the air |
-
149. Refrigerant used in vapour absorption refrigerator is
- | | |
|--------------|-----------|
| (1) Freon-12 | (2) Water |
| (3) Ammonia | (4) F-11 |
-
150. If window air conditioner is kept at the centre of closed room, then temperature of the room will
- | | |
|----------------|-------------------|
| (1) increase | (2) decrease |
| (3) not change | (4) unpredictable |
-

