

1. (a) For a simplified version of automatic repeat request (ARQ) scheme:

Derive a simple expression of the performance of the selective repeat ARQ scheme for $N > 2a + 1$ and $N < 2a + 1$.

Clearly state the meaning of a and N and discuss all assumptions and approximations made. [6]

- (b) Derive the performance of a 1-persistent CSMA/CD protocol in terms of channel efficiency. Clearly state the meaning of all variables used and discuss all assumptions made. [6]

- (c) For the DQDB operation example presented in *Figure 1.1*:

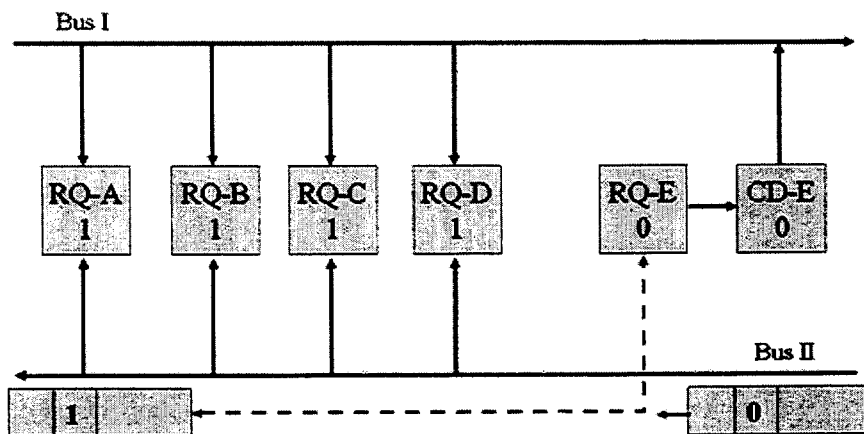


Figure 1.1

There are five stations (A, ..., E) attached to the DQDB bus.

Assume that the data transmission is limited to Bus I and that there are no outstanding requests (i.e. to start all nodes have an RQ value of 0.)

Figure 1.1. depicts the case where Station E is requesting a time slot transmission and that this request is placed in Bus II.

Complete all the missing RQ and CD counter values in the following sequence:

1. Station B request for time slot transmission
2. Station C request for time slot transmission
3. A free time slot is available in Bus I for transmission
4. A free time slot is available in Bus I for transmission

[8]

2. (a) For a network composed of N nodes and L links, the mean network packet delay T has been defined as:

$$T = \frac{1}{\gamma} \sum_{i=1}^L \frac{F_i}{C_i - F_i} \quad (2.1)$$

where γ is the total offered load in kbit/s, F_i is the traffic flow in kbit/s carried by link i and C_i be the capacity of that link in kbit/s of link i .

(i) Explain and discuss the importance of Little's theorem. [3]

(ii) Discuss how would you use Little's theorem to derive T . [3]

- (b) Consider the network of Figure 2.1 where $C(i,j)$ is the link capacity in kbit/s. Consider also the background traffic demands $Traf(i,j)$ with origin node i and destination node j :

$$Traf(2,3) = 2 \text{ kbit/s}$$

$$Traf(3,2) = 1 \text{ kbit/s}$$

$$Traf(2,5) = 3 \text{ kbit/s}$$

$$Traf(3,4) = 1 \text{ kbit/s}$$

$$Traf(4,5) = 2 \text{ kbit/s}$$

$$Traf(5,4) = 3 \text{ kbit/s}$$

Assuming that all traffic demands $Traf(i,j)$ are placed using a minimum hop policy, and that the length of each link of the network is given by:

$$l_{(i,j)} = \frac{C(i,j)}{(C(i,j) - F(i,j))^2} \quad (2.2)$$

where, $F(i,j)$ is the traffic flow in kbit/s carried by link (i,j) .

- (i) Using node one (1) as your reference node, show step by step all the iterations of the Dijkstra's shortest path algorithm. [14]

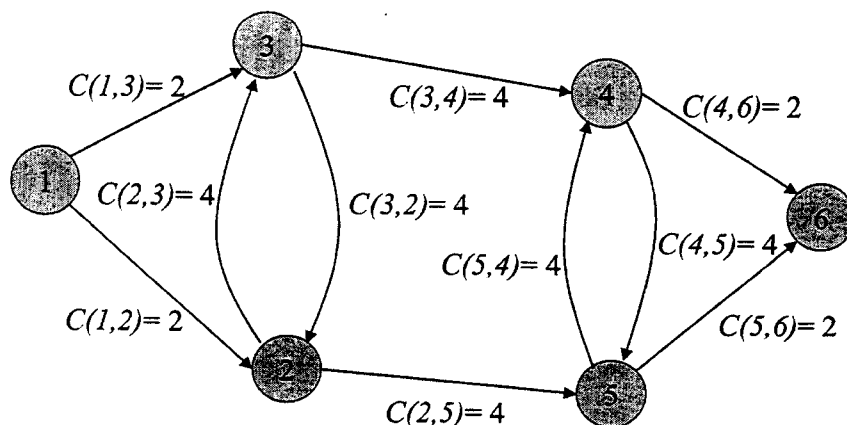


Figure 2.1

3. (a) For the network of *Figure 3.1*, consider the cost function D defined by:

$$D = \sum_{i=1}^L \frac{F(i)}{C(i) - F(i)} \quad (3.1)$$

where, $C(i)$ is the capacity of link i , $F(i)$ is the flow carried by link i , and L is the maximum number of links in the network.

Assume the value of $C(1) = C(2) = C(3) = C(4) = 20 \text{ kbit/s}$ and $C(5) = 5 \text{ kbit/s}$.

Calculate the minimum magnitude of offered traffic $R(1, 4)$ that will be needed for link $C(5)$ to start carrying traffic. [5]

(b) Assume that the network capacity values are $C(1) = C(2) = C(3) = C(4) = 20 \text{ kbit/s}$ and $C(5) = 10 \text{ kbit/s}$ and that the offered load of $R(1, 4) = 10 \text{ kbit/s}$:

Calculate the mean network delay $T = D/\gamma$. [5]

(c) Assume that the cost of deploying capacity in the network is £ 1000 per kbit/s link and that you have the following two options:

- (i) Include only $C(1), \dots, C(4)$ in the solution,
- (ii) Solve the problem deploying only $C(5)$.

Suggest the best design option if it is required that the network operates at a point in which $T \leq 0.125$. Discuss your findings. [10]

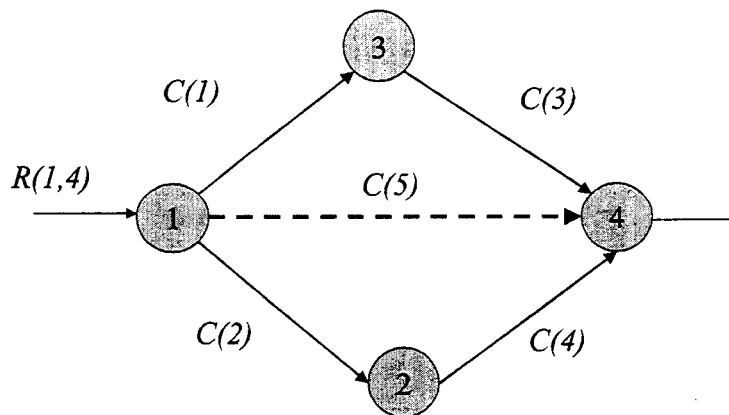


Figure 3.1

4. (a) Network Survivability is an issue of great concern to the telecommunication industry. Define and discuss briefly the following terms:
- (i) Traffic restoration,
 - (ii) Facility restoration,
 - (iii) Protection switching,
 - (iv) Re-routing,
 - (v) Self healing. [10]
- (b) ITU-T and the ATM Forum have identified a range of traffic control functions to maintain the quality of ATM connections. In brief:
- (i) Describe and discuss the relevance of Connection Traffic Descriptors. [4]
 - (ii) Describe Generic Cell Rate Algorithms (GCRA). Give an example of a possible implementation of a GCRA. [6]
5. (a) Discuss the relevance and underlying characteristics of UDP and TCP protocols. Give examples of possible applications. [10]
- (b) Discuss the principles of multi-protocol label switching (MPLS) and explain its benefits. [10]